

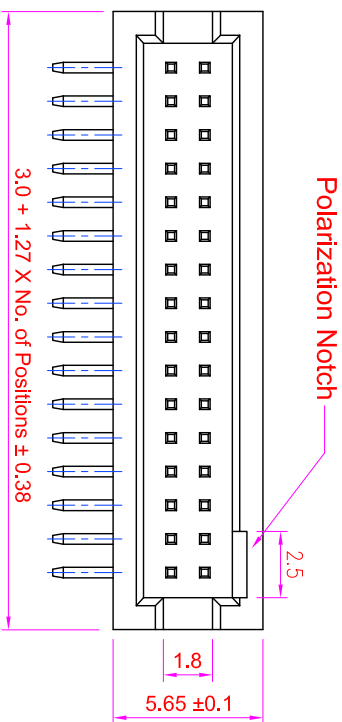
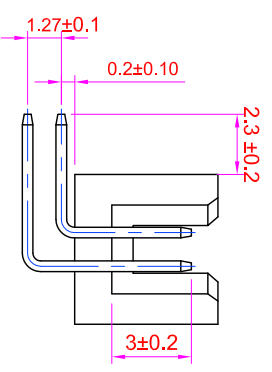


ROHS

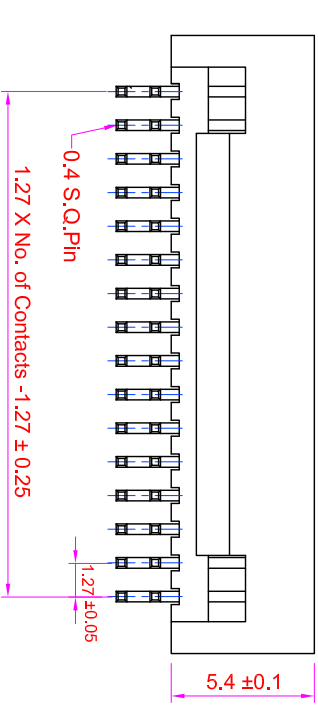

**Recommended
P.C. Board Hole Layout**

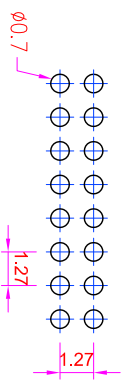

Specifications

- Current Rating : 1 Amp
- Insulator Resistance : 1000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 300V
- Operating Temperature : -40°C ~ +105°C
- Contact Material : Brass
- Insulator Material : Polyester, UL 94V-0 LCP
- Contact Plated : See Option
- Standard: Full Gold Flash

Order Information

BHC1 - R 0 XX - C 0 XX

Serial No. _____

Terminal Type _____

R : Right Angle Type

No. of Contact _____

Body Option _____

C:With Polarization Notch

Contact Plated _____

Contact Plating Option	Full Gold Plating	Gold Plated On Contact Area Tin Plated On Solder Area	Full Tin Plating
GA : Gold Flash GC : Gold 10u" GD : Gold 15u" GE : Gold 30u"	SA : Gold Flash SC : Gold 10u" SD : Gold 15u" SE : Gold 30u"	TA : Tin 100u"	

GENERAL TOLERANCE		單位 (UNIT)	
X. ± 0.50	X. ° ± 5°	mm	
.X ± 0.20	.X ° ± 2°	Alice	
.X X ± 0.10	.X X ° ± 1°	Mary	
DATE:2016/03/04	SSV1	Fen-Fen	

料號 (PART NO.)	圖號 (DWG NO.)
BHC1-R0XX-00XX	BHC1-R0XX

比例 (SCALE)	圖號 (DWG NO.)
5:1	BHC1-R0XX

IO PARTS Enterprise Co., Ltd.

名標 (TITLE): Box Header P1.27 X 1.27mm
H:5.4mm Right Angle Type

Rev	Modification	Date	Validate