

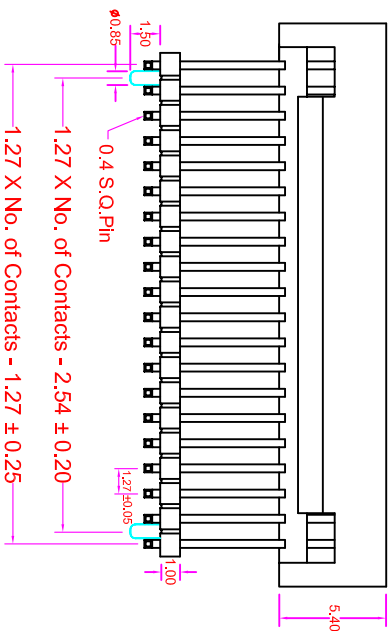
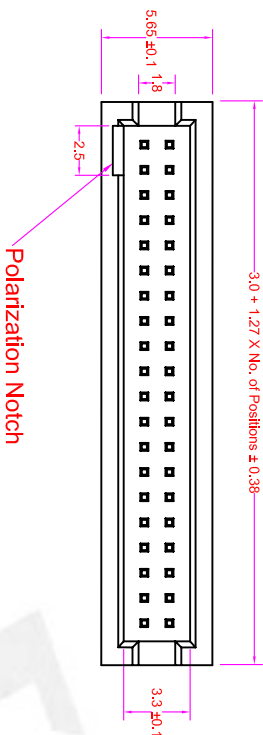


ROHS



**Recommended
P.C. Board SMD Layout**

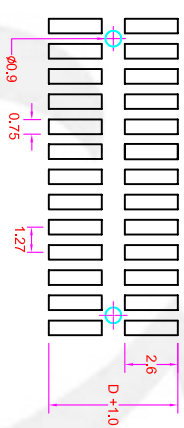

Specifications

- Current Rating : 1 Amp
- Insulator Resistance : 1000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 300V
- Operating Temperature : -40° C ~ +105° C
- Contact Material : Brass
- Insulator Material : Polyester, UL 94V-0 Nylon-6T
- Contact Plated : See Option
- Standard: Full Gold Flash

Order Information

BHCA - M 0 XX - X XX XX - X X

Serial No. _____

Terminal Type _____

M:SMD Type _____

No. of Contacts _____

Body Option _____

A:With Post & With Polarization Notch

C:Without Post & With Polarization Notch

Terminal Dim. Type _____

01,A=,.....,B=,.....,D=,.....

02,A=,.....,B=,.....,D=,.....

Contact Plated _____

Cap Option _____

B : Blank

P : Plastic Cap

Packing Method _____

T : In Tube

R : Tape & Reel

Contact Plating Option	Full Gold Plating	Gold Plated On Contact Area Tin Plated On Solder Area	Full Tin Plating
	GA : Gold Flash GB : Gold 10u" GC : Gold 15u" GD : Gold 30u"	SA : Gold Flash SB : Gold 10u" SC : Gold 15u" SD : Gold 30u" SE : Gold 50u"	TA : Tin 100u"

GENERAL TOLERANCE		單位 (UNIT)
X. ± 0.50	X. ° ± 5°	mm
. X ± 0.20	. X ° ± 2°	
. XX ± 0.10	. XX ° ± 1°	
DAT/ES200907/29	SUVZ	

料號 (PART NO.)	BHCA-MOXX-AXXXX-XX
單位 (UNIT)	mm
審核 (APPROVAL)	Alice
校對 (CHECKED)	Mary
製圖 (DRAWN)	Fen-Fen

圖號 (DWG NO.)	BHCA-MOXX-A
比例 (SCALE)	5:1
圖說 (REV.)	A

允允企業有限公司
IO PARTS Enterprise Co., Ltd.

名稱 (TITLE) : Box Header P1.27 X 1.27mm
H:5.4mm, Elevated Story, SMD Type