更改 REV	設 變 內 容 MODIFICATION

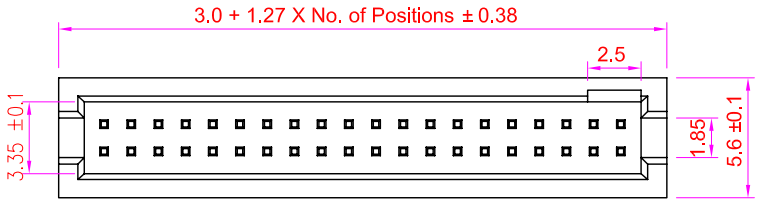

Recommended P.C. Board Hole Layout

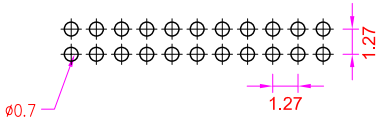

Specifications

Current Rating : 1 Amp
Insulatior Resistance : 1000 Megohms min.
Contact Resistance : 20 m ohms max.
Dielectric Withstanding : AC 300V
Operating Temperature : -40°C ~ +105°C
Contact Materil : Brass
Insulator Material : Polyester, UL 94V-0
Standard : Nylon-6T
Contact Plated : See Option / Standard Full Gold

Order Information

BHCA - S 0 XX - C XX XX- B T - X

- Serial No.
- Termial Type
  S : Straight Type
- No. of Contact
- Body Option
  C:Without Post & With Polarization Notch
- Terminal Dim. Type
  XX. A=...mm ,B=...mm
- Contact Plated
- Cap Option
  B : Blank
- Packing Method
  T : In Tube
- Insulator Option
  N : Nylon-6T (Standard)
  L : LCP

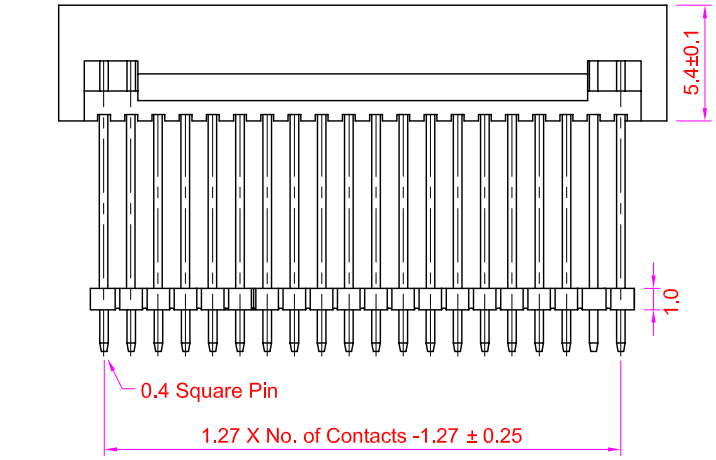

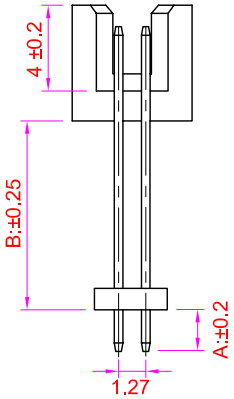

Contact Plating Option	Full Gold Plating	Gold Plated On Contact Area Tin Plated On Solder Area	Full Tin Plating
	GA : Gold Flash GC : Gold 10u" GD : Gold 15u" GE : Gold 30u"	SA : Gold Flash SC : Gold 10u" SD : Gold 15u" SE : Gold 30u"	TA : Tin 100u"

GENERIAL TOLERANCE	
X . ± 0.50	X . ° ± 5 °
. X ± 0.20	. X ° ± 2 °
. X X ± 0.10	. X X ° ± 1 °
Date:2011/01/12	S5V2

單 位 (UNIT)	料 號 (PART NO.)	圖號 (DWG NO.)
mm	BHCA-S0XX-CXXX-BT	BHCA-S0XX

審核 (APPROVAL)	核對 (CHECKED)	製圖 (DRAWN)
Alice	Mary	Fen-Fen

比 例 SCALE 3 : 1 | 張 數 SHEET 1 / 1 | 角 法 PROJ. | 更 改 REV. 1.0

名稱 (TITLE): Box Header P1.27 X 1.27mm Elevated Story, SMD Type

IO 竑允企業有限公司 IO PARTS Enterprise Co.,Ltd.