


Recommended

P.C. Board Hole Layout





- Specifications**
- Current Rating : 3 Amps
 - Insulator Resistance : 1000 Megohms min.
 - Contact Resistance : 20 m ohms max.
 - Dielectric Withstanding : AC 600V
 - Operating Temperature : -40°C ~ +105°C
 - Contact Material : Phosphor Bronze
 - Insulator Material : Polyester, UL 94V-0 P.B.T.
 - Contact Plated : See Option
 - Standard: Full Gold Flash

Order Information

FHA2 - S 2 XX - 00 XX - X

- Serial No. _____
- Terminal Type _____
- S : Straight Type
- Row Type _____
- 2 : Dual Row
- No. of Contact Per Row _____
- Contact Plated _____
- Insulator Material _____
- Blank : P.B.T.
- 9: Nylon-9T

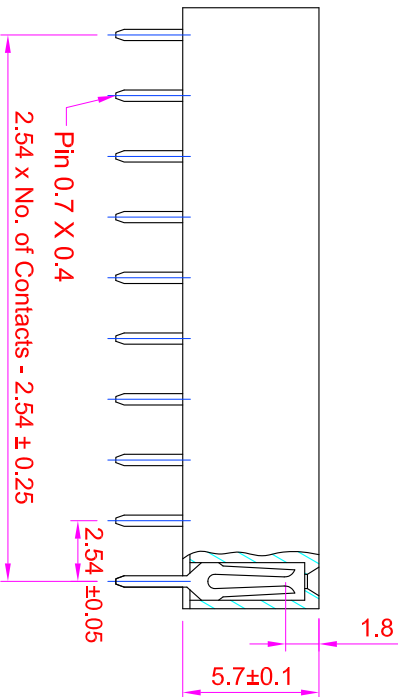

Contact Plating Option	Full Gold Plating	Gold Plating On Contact Area Tin Plating On Solder Area	Full Tin Plating
GA : Gold Flash GC : Gold 10u" GD : Gold 15u" GE : Gold 30u"	SA : Gold Flash SC : Gold 10u" SD : Gold 15u" SE : Gold 30u"	TA : Tin 100u"	

GENERAL TOLERANCE	
X. ± 0.50	X. ° ± 5°
.X ± 0.20	.X ° ± 2°
.XX ± 0.10	.XX ° ± 1°
DATE:2008/03/05	SCM1

單位 (UNIT)	料號 (PART NO.)	檢驗 (CHECKED)	製圖 (DRAWN)
mm	FHA2-S2XX-00XX-X	Mary	Fen-Fen
Alice			

圖號 (DWG NO.)	比例 (SCALE)	張數 (SHEET)	圖號 (REV.)
FHA2-S2XX	3:1	1/1	A

玖允企業有限公司
IO PARTS Enterprise Co., Ltd.

名稱 (TITLE): Female Header P-2.54 x 2.54 mm
Profile : 5.7mm, Straight Type, Dual Row