




# ROHS




0.5+2.54 X No. of Positions ±0.30

2.54

## Recommended P.C. Board SMD Layout

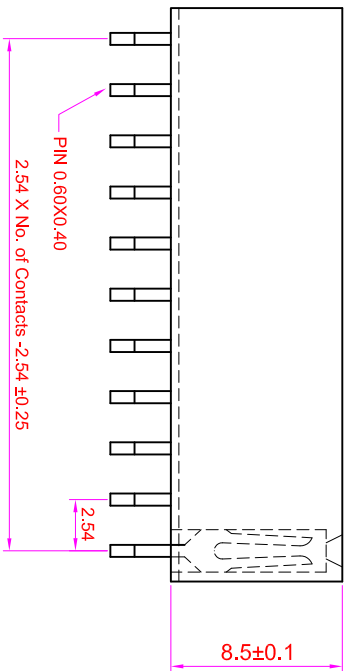

2.54 X No. of Contacts -2.54 ±0.25



- Specifications**
- Current Rating : 3 Amps
  - Insulator Resistance : 1000 Megohms min.
  - Contact Resistance : 20 m ohms max.
  - Dielectric Withstanding : AC 600V
  - Operating Temperature : -40°C ~ +105°C
  - Contact Material : Phosphor Bronze
  - Insulator Material : Polyester, UL 94V-0 NY6T
  - Contact Plated : See Option
  - Standard: Full Gold Flash

## Order Information

FHA3 - H 1 XX - 00 XX

- Serial No. \_\_\_\_\_
- Terminal Type \_\_\_\_\_
- H : Horizontal Type
- Row Type \_\_\_\_\_
- 1 : Single Row
- No. of Contact Per Row \_\_\_\_\_
- Contact Plated \_\_\_\_\_

Contact Plating Option	Full Gold Plating	Gold Plating On Contact Area Tin Plating On Solder Area	Full Tin Plating
	GA : Gold Flash GC : Gold 10u" GD : Gold 15u" GE : Gold 30u"	SA : Gold Flash SD : Gold 10u" SE : Gold 15u" SF : Gold 30u"	TA : Tin 100u"

GENERAL TOLERANCE		單位 (UNIT)		料號 (PART NO.)		圖號 (DWG NO.)	
X. ± 0.50	X. ° ± 5°	mm		FHA3-H1XX-00GA		FHA3-H1XX	
.X ± 0.20	.X ° ± 2°	Alice		Fen-Fen		3:1	
.XX ± 0.10	.XX ° ± 1°	Mary		REV. A		名額 (TITLE): Profile : 8.5mm, Single Row, Horizontal SMD Type	
DATE:2016/08/19	SCM1	審核 (APPROVAL)		製圖 (DRAWN)		IO PARTS Enterprise Co., Ltd.	

**玖允企業有限公司**  
IO PARTS Enterprise Co., Ltd.