

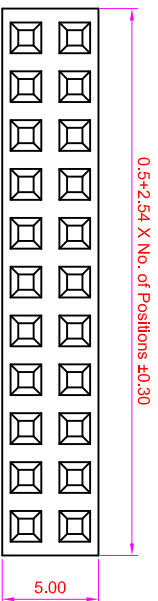
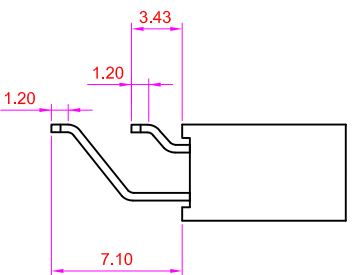


**ROHS**

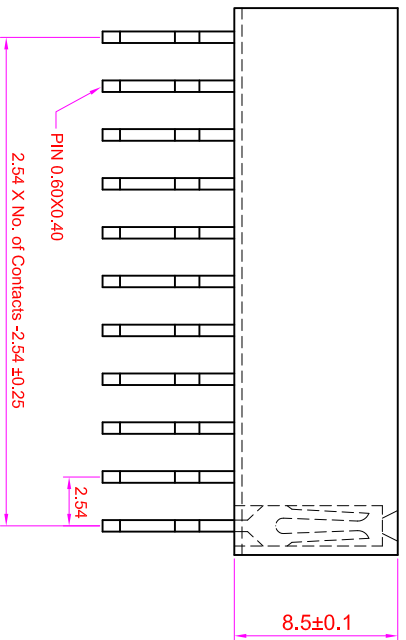

**Recommended  
P.C. Board SMD Layout**



Rev	Modification	Date	Validate

Specifications

- Current Rating : 3 Amps
- Insulator Resistance : 1000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 600V
- Operating Temperature : -40°C ~ +105°C
- Contact Material : Phosphor Bronze
- Insulator Material : Polyester, UL 94V-0 NY9T
- Contact Plated : See Option
- Standard: Full Gold Flash

Order Information

FHA3 - H 2 XX - 00 XX

- Serial No. \_\_\_\_\_
- Terminal Type \_\_\_\_\_
- H : Horizontal Type
- Row Type \_\_\_\_\_
- 2 : Dual Row
- No. of Contact Per Row \_\_\_\_\_
- Contact Plated \_\_\_\_\_

Contact Plating Option	Full Gold Plating	Gold Plating On Contact Area Tin Plating On Solder Area	Full Tin Plating
GA : Gold Flash GC : Gold 10u" GD : Gold 15u" GE : Gold 30u"	SA : Gold Flash SC : Gold 10u" SD : Gold 15u" SE : Gold 30u"	TA : Tin 100u"	

GENERAL TOLERANCE		單位 (UNIT)	料號 (PART NO.)	圖號 (DRAWN)	圖號 (DWG NO.)	比例 (SCALE)	圖號 (REV.)	名稱 (TITLE)
X. ± 0.50	X. ° ± 5°	mm	FHA3-H2XX-00GA	Fen-Fen	FHA3-H2XX	3:1	A	Female Header P:2.54 x 2.54mm Profile : 8.5mm, Dual Row, Horizontal SMD Type
.X ± 0.20	.X ° ± 2°							
.X X ± 0.10	.X X ° ± 1°							
DATE:20090827	SCM1	Alice	Mary	Fen-Fen				

**宏允企業有限公司**  
IO PARTS Enterprise Co., Ltd.