
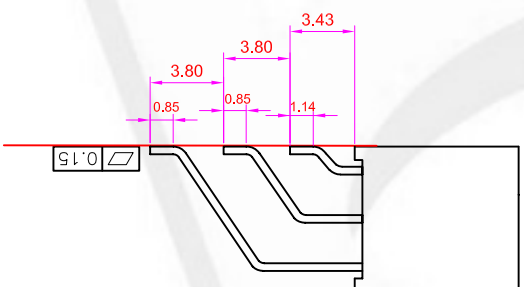
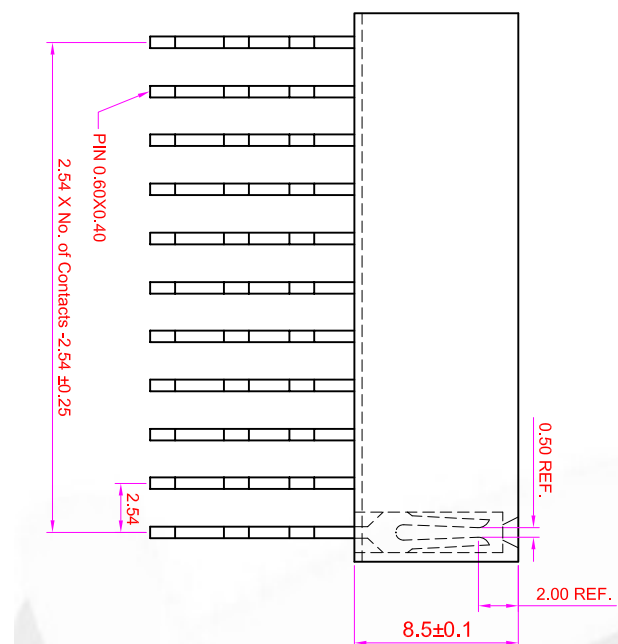
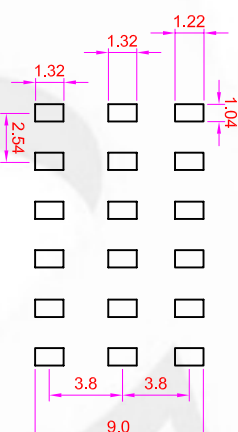


# ROHS

## Recommended P.C. Board SMD Layout

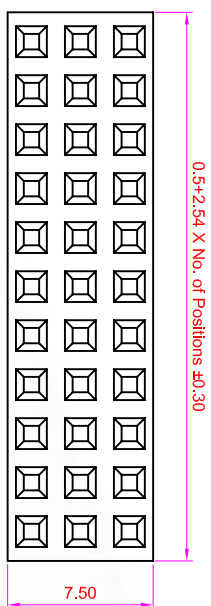

### Specifications

- Current Rating : 3 Amps
- Insulator Resistance : 1000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 600V
- Operating Temperature : -40°C ~ +105°C
- Contact Material : Phosphor Bronze
- Insulator Material : Polyester, UL 94V-0 LCP
- Contact Plated : See Option
- Standard: Full Gold Flash

### Order Information

FHA3 - H 3 XX - 0 0 XX

Serial No. \_\_\_\_\_

Terminal Type \_\_\_\_\_

H : Horizontal Type

Row Type \_\_\_\_\_

3 : Triple Row

No. of Contact Per Row \_\_\_\_\_

Contact Plated \_\_\_\_\_

Contact Plating Option	Full Gold Plating	Gold Plating On Contact Area Thin Plating On Solder Area	Full Tin Plating
GA : Gold Flash	GC : Gold 10u"	SA : Gold Flash	TA : Tin 100u"
GD : Gold 15u"	SD : Gold 15u"	SE : Gold 30u"	
GE : Gold 30u"			

GENERAL TOLERANCE		單位 (UNIT)		料號 (PART NO.)		圖號 (DWG NO.)		比例 (SCALE)		圖號 (DWG NO.)	
X ± 0.50	X ° ± 5°	mm	FHA3-H3XX-00GA	FHA3-H3XX	3:1	1/1	名稱 (TITLE):	允允企業有限公司 IO PARTS Enterprise Co., Ltd.			
.X ± 0.20	.X ° ± 2°	審核 (APPROVAL)	Fen-Fen	比尺 (SCALE)	3:1	圖號 (DWG NO.)	名稱 (TITLE):	Female Header P-2.54 X 2.54mm			
.XX ± 0.10	.XX ° ± 1°	Alice	Mary	圖號 (DWG NO.)	Fen-Fen	圖號 (DWG NO.)	圖號 (DWG NO.)	Profile : 8.5mm, Triple Row, Horizontal SMD Type			
DATE: 2009/05/27	SCM1			圖號 (DWG NO.)		圖號 (DWG NO.)	圖號 (DWG NO.)				

允允企業有限公司  
IO PARTS Enterprise Co., Ltd.

名稱 (TITLE):  
Female Header P-2.54 X 2.54mm  
Profile : 8.5mm, Triple Row, Horizontal SMD Type