



**ROHS**

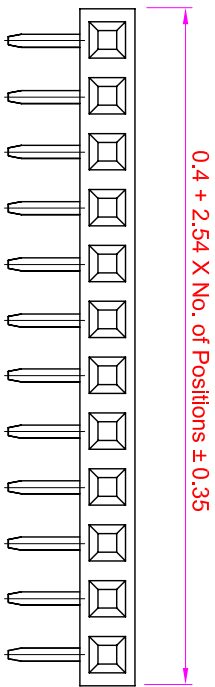

Recommended  
P.C. Board Hole Layout





Specifications

- Current Rating : 3 Amps
- Insulator Resistance : 1000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 600V
- Operating Temperature : -40°C ~ +105°C
- Contact Material : Brass
- Insulator Material : Polyester, UL 94V-0 P.B.T.
- Contact Plated : See Option
- Standard: Full Gold Flash

Order Information

FHA3 - R 1 XX - 0 0 XX

- Serial Type \_\_\_\_\_
- Terminal Type \_\_\_\_\_
- R : Right Angle Type \_\_\_\_\_
- Row Type \_\_\_\_\_
- 1 : Single Row \_\_\_\_\_
- No. of Pin per Row \_\_\_\_\_
- Contact Plated \_\_\_\_\_

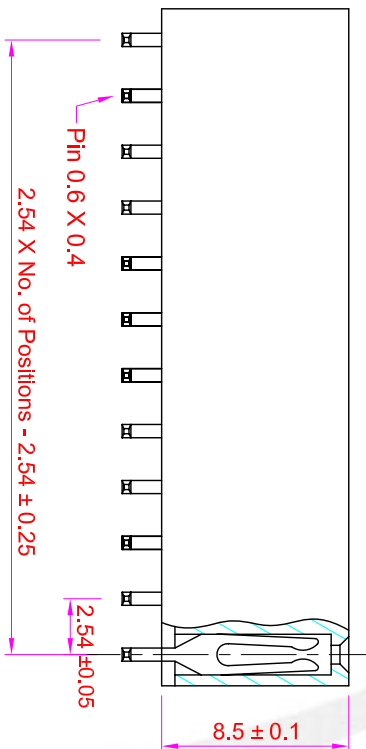

Contact Plating Option	Full Gold Plating	Gold Plating On Contact Area Tin Plating On Solder Area	Full Tin Plating
GA : Gold Flash GC : Gold 100" GD : Gold 300" GE : Solder 300"	SA : Gold Flash SC : Gold 100" SD : Gold 300" SE : Solder 300"	TA : Tin 1000"	

GENERAL TOLERANCE		單位 (UNIT)	
X. ± 0.50	X. ° ± 5°	mm	
.X ± 0.20	.X ° ± 2°	審核 (APPROVAL)	
.XX ± 0.10	.XX ° ± 1°	Alice	
DATE:20080305	SCM1	料號 (PART NO.)	FHA3-R1XX-00XX

圖號 (DWG. NO.)		製圖 (DRAWN)	
FHA3-R1XX	3:1	Fen-Fen	
張數	1/1	校對 (CHECKED)	Mary
REV.	A	DATE:20080305	SCM1

名稱 (TITLE):	
Female Header P2.54 X 2.54mm	
Profile : 8.5mm, Single Row, Right Angle Type	

**IP** 友允企業有限公司  
IO PARTS Enterprise Co., Ltd.

1 2 3 4 5 6 7 8 9 10 11 12