

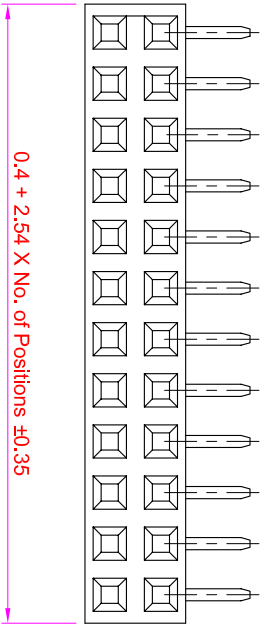



ROHS

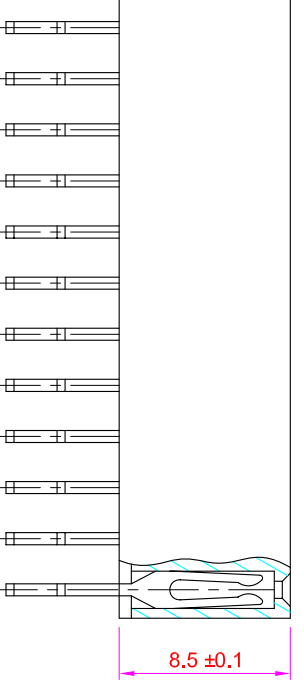

**Recommended
P.C. Board Hole Layout**



Rev	Modification	Date	Validate

Specifications

- Current Rating : 3 Amps
- Insulator Resistance : 1000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 500V
- Operating Temperature : -40° C ~ +105° C
- Contact Material : Brass
- Insulator Material : Polyester, UL 94V-0 P.B.T.
- Contact Plated : See Option
- Standard: Full Gold Flash

Order Information

- Serial No. FHA3 - R 2 XX - 0 0 XX - X
- Terminal Type
- R : Right Angle Type
- Row Type
- 2 : Dual Row
- No. of Contact Per Row
- Contact Plated
- Insulator Material
- Blank : P.B.T. (Standard)
- N : Nylon-6T

Contact Plating Option	Full Gold Plating	Gold Plating On Contact Area Tin Plating On Solder Area	Full Tin Plating
GA : Gold Flash GC : Gold 10u" GD : Gold 15u" GE : Gold 30u"	SA : Gold Flash SC : Gold 10u" SD : Gold 15u" SE : Gold 30u"	TA : Tin 100u"	

GENERAL TOLERANCE		單位 (UNIT)	
X. ± 0.50	X. ° ± 5°	mm	mm
. X ± 0.20	. X ° ± 2°		
. X X ± 0.10	. X X ° ± 1°		
DATE:20080603	SCM1		

料號 (PART NO.)	單位 (UNIT)	審核 (APPROVAL)	料號 (CHECKED)	製圖 (DRAWN)
FHA3-R2XX-00XX	mm	Alice	Mary	Fen-Fen

圖號 (DWG NO.)	比例 (SCALE)	圖號 (REV.)
FHA3-R2XX	3:1	A

IO PARTS ENTERPRISE CO., LTD.
 名稱 (TITLE): Female Header P-2.54 x 2.54mm
 Profile: 8.5mm Right Angle Type

J I H G F E D C B A

J I H G F E D C B A

1 2 3 4 5 6 7 8 9 10 11 12