

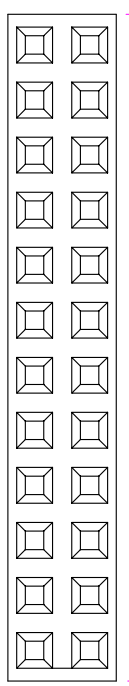
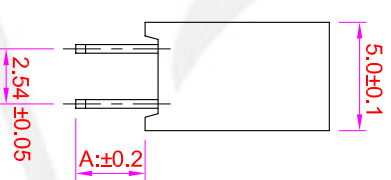


ROHS

0.4 + 2.54 X No. of Positions ± 0.35

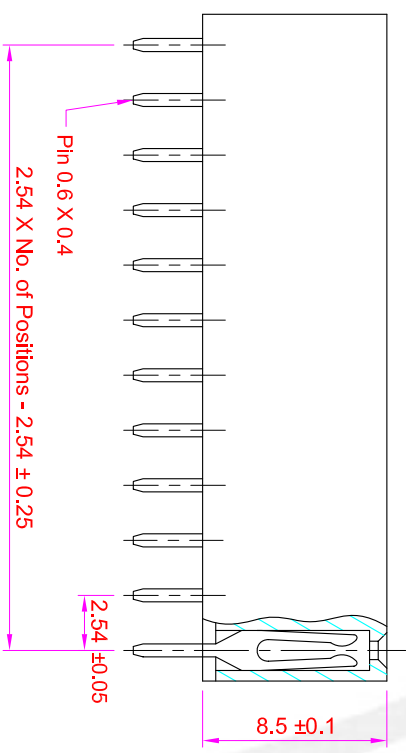

Recommended
P.C. Board Hole Layout



Specifications

- Current Rating : 3 Amps
- Insulator Resistance : 1000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 600V
- Operating Temperature : -40°C ~ +105°C
- Contact Material : Brass
- Insulator Material : Polyester, UL 94V-0 P.B.T.
- Contact Plated : See Option

Order Information

FHA3 - S 2 XX - 0 X XX -X

- Serial Type _____
- Terminal Type _____
- S : Straight Type _____
- Row Type _____
- 2 : Dual Row _____
- No. Of Pin Per Row _____
- Terminal Dim. _____
- 0: A: 3.2mm (Standard)
- Contact Plated _____
- Insulator Material _____
- Blank : P.B.T. (Standard)
- N : Nylon-6T

Full Gold Plating	Gold Plating On Contact Area	Full Tin Plating
GA : Gold Flash GC : Gold 10u" GD : Gold 15u" GE : Gold 30u"	SA : Gold Flash SC : Gold 10u" SD : Gold 15u" SE : Gold 30u"	TA : Tin 100u"

IO PARTS Enterprise Co., Ltd.



Female Header P2.54 X 2.54mm
Profile : 8.5mm, Dual Row, Straight Type

GENERAL TOLERANCE	單位 (UNIT)	料號 (PART NO.)	圖號 (DWG NO.)
X. ± 0.50	mm	FHA3-S2XX-0XXX-X	FHA3-S2XX
X. ° ± 5°		核對 (CHECKED)	比例 SCALE 3:1
.X ± 0.20		Mary	張數 SHEET 1/1
.X X ± 0.10		Fen-Fen	單位 REV. B
DATE:2008/05/28		製圖 (DRAWN)	名稱 (TITLE):
SCM1		Alice	Female Header P2.54 X 2.54mm
			Profile : 8.5mm, Dual Row, Straight Type