

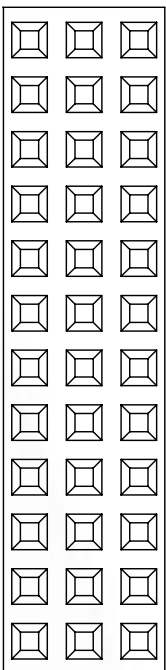
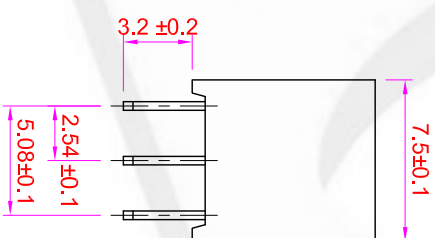


ROHS

0.3 + 2.54 X No. of Positions ± 0.3

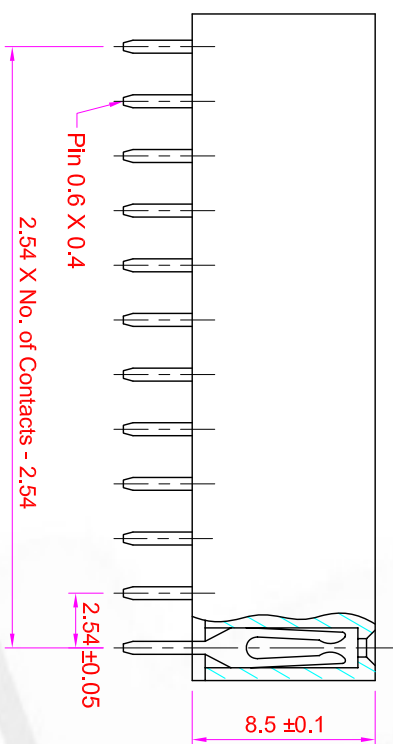

Recommended P.C. Board Hole Layout

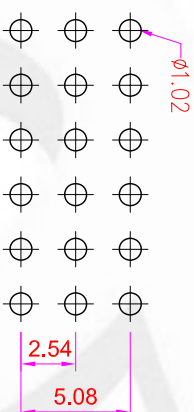

Specifications

- Current Rating : 3 Amps
- Insulator Resistance : 1000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 600V
- Operating Temperature : -40° C ~ +105° C
- Contact Material : Brass
- Insulator Material : Polyester, UL 94V-0 P.B.T.
- Contact Plated : See Option
- Standard: Full Gold Flash

Order Information

FHA3 - S 3 XX - 0 0 XX - N

- Serial No. _____
- Terminal Type _____
- S : Straight Type
- Row Type _____
- 3 : Triple Row
- No. of Contact Per Row _____
- Contact Plated _____
- Insulator Option _____
- Blank : P.B.T. (Standard)
- N : Nylon-6T

Contact Plating Option	Full Gold Plating	Gold Plating On Contact Area Tin Plating On Solder Area	Full Tin Plating
GA : Gold Flash GC : Gold 10u" GD : Gold 15u" GE : Gold 30u"	SA : Gold Flash SC : Gold 10u" SD : Gold 15u" SE : Gold 30u"	TA : Tin 100u"	

GENERAL TOLERANCE		單位 (UNIT)	
X. \pm 0.50	X. \pm 5°	mm	
.X \pm 0.20	.X \pm 2°		
.XX \pm 0.10	.XX \pm 1°		
DATE:2008/03/05	SCM1		

審核 (CHECKED)	繪圖 (DRAWN)	單位 (UNIT)	料號 (PART NO.)
Alice	Mary	Fen-Fen	FHA3-S3XX-00XX-X

圖號 (DWG. NO.)	比例 (SCALE)	圖號 (DWG. NO.)	比例 (SCALE)
FHA3-S3XX	3:1	FHA3-S3XX	3:1

圖號 (DWG. NO.)	比例 (SCALE)	圖號 (DWG. NO.)	比例 (SCALE)
FHA3-S3XX	3:1	FHA3-S3XX	3:1

坵允企業有限公司
IO PARTS Enterprise Co., Ltd.

名稱 (TITLE): Female Header P:2.54 X 2.54mm
Profile : 8.5mm, Triple Row, Straight Type