
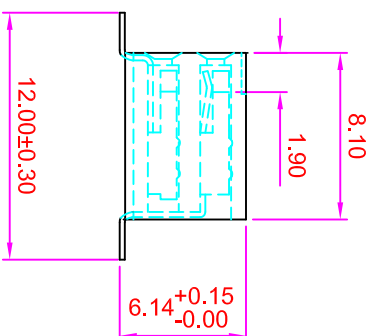
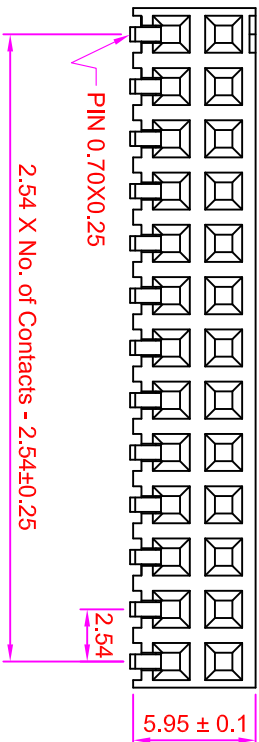
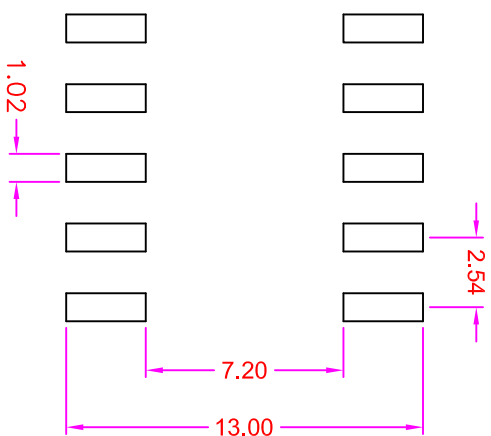


ROHS

Recommended P.C. Board SMD Layout

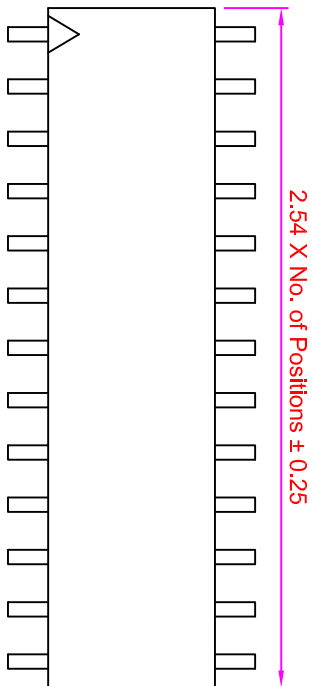

Rev	Modification	Date	Validate
-----	--------------	------	----------

Specifications

- Current Rating : 3 Amps
- Insulator Resistance : 1000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 600V
- Operating Temperature : -40°C ~ +105°C
- Contact Material : Phosphor Bronze
- Insulator Material : Polyester, UL 94V-0
- Standard : Nylon-9T
- Contact Plated : See Option / Standard: Full Gold

Order Information

FHA8 - M 2 XX - 0 0 XX - XX

- Serial No. _____
- Terminal Option _____
- M : SMD Type _____
- Row Option _____
- 2 : Dual Row _____
- No. of Contact Per Row _____
- Contact Plated _____
- Cap Option _____
- B : No Cap _____
- Packing Method _____
- T : In Tube _____
- R : Tape & Reel _____

Contact Plating Option	Full Gold Plating	Gold Plating On Contact Area Tin Plating On Solder Area	Full Tin Plating
GA : Gold Flash GC : Gold 100" GD : Gold 150" GE : Gold 300"	SA : Gold Flash SC : Gold 100" SD : Gold 150" SE : Gold 300"	TA : Tin 1000"	

GENERAL TOLERANCE		單位 (UNIT)	料號 (PART NO.)	圖號 (DWG NO.)	比例 (SCALE)	張數 (SHEET)	名稱 (TITLE):
X. ± 0.50	X. ° ± 5°	mm	FHA8-M2XX-00XX-XX	FHA8-M2XX	3:1	1/1	IO PARTS Enterprise Co., Ltd.
.X X ± 0.20	.X ° ± 2°	Alice	審核 (CHECKED) Mary	製圖 (DRAWN) Fen-Fen	布法 (PROJ.)	A	Female Header Pitch 2.54mm
.X X ± 0.10	.X X ° ± 1°						Profile : 5.95mm, Dual Row, Side Entry Type
DATE:2008/03/05	SCM1						

艾允企業有限公司
IO PARTS Enterprise Co., Ltd.