

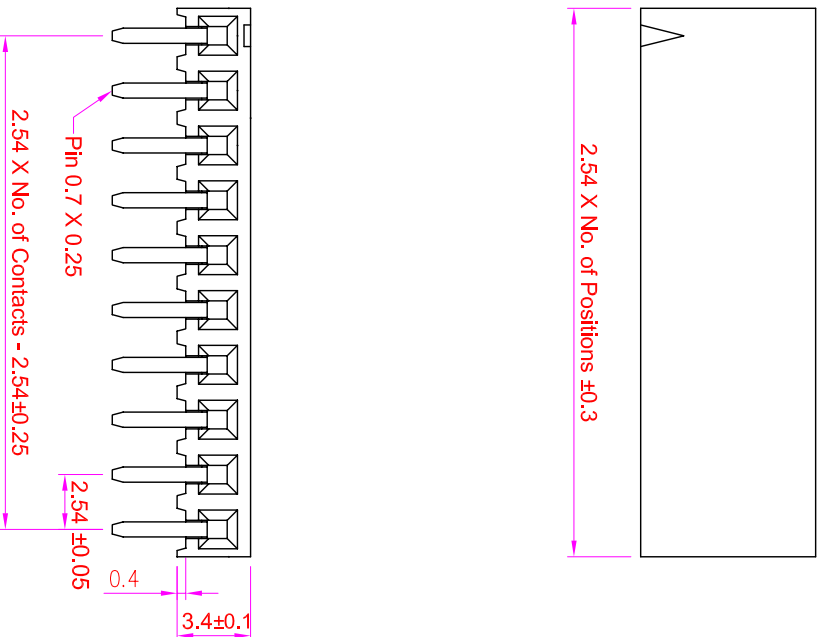


ROHS

Recommended
P.C. Board Hole Layout



- Specifications**
- Current Rating : 3 Amps
 - Insulator Resistance : 1000 Megohms min.
 - Contact Resistance : 20 m ohms max.
 - Dielectric Withstanding : AC 600V
 - Operating Temperature : -40°C ~ +105°C
 - Contact Material : Phosphor Bronze
 - Insulator Material : Polyester, UL 94V-0
 - Standard : P.B.T.
 - Contact Plated : See Option / Standard: Full Gold

Order Information

- FHA8 - S 1 XX - 0 0 XX - X
- Serial Type
 - Terminal Type
 - S : Straight Type
 - Row Type
 - 1 : Single Row
 - No. of Pin Per Row
 - Contact Plating
 - Insulator Option
 - Blank : P.B.T.
 - N : Nylon-6T

Contact Plating Option	Full Gold Plating	Gold Plating On Contact Area Thin Plating On Solder Area	Full Tin Plating
GA : Gold Flash GC : Gold 10u" GD : Gold 15u" GE : Gold 30u"	SA : Gold Flash SC : Gold 10u" SD : Gold 15u" SE : Gold 30u"	TA : Tin 100u"	

GENERAL TOLERANCE		單位 (UNIT)	
X. ± 0.50	X. ° ± 5°	mm	
.X ± 0.20	.X ° ± 2°	番板 (APPROVAL)	
.XX ± 0.10	.XX ° ± 1°	Alice	
DATE:2008/03/05	SCM1	校對 (CHECKED)	
		Mary	
		製圖 (DRAWN)	
		Fen-Fen	

料號 (PART NO.)	FHA8-S1XX-00XX
圖號 (DWG NO.)	FHA8-S1XX
比例 (SCALE)	3:1
圖法 (PROJ.)	第一角
張數 (SHEET)	1/1
更改 (REV.)	A

名稱 (TITLE):	Female Header Pitch 2.54mm
Profile :	3.4mm, Single Row, Side Entry Type


坊允企業有限公司
 IO PARTS Enterprise Co., Ltd.

A 1 2 3 4 5 6 7 8 9 10 11 12

J I H G F E D C B A