

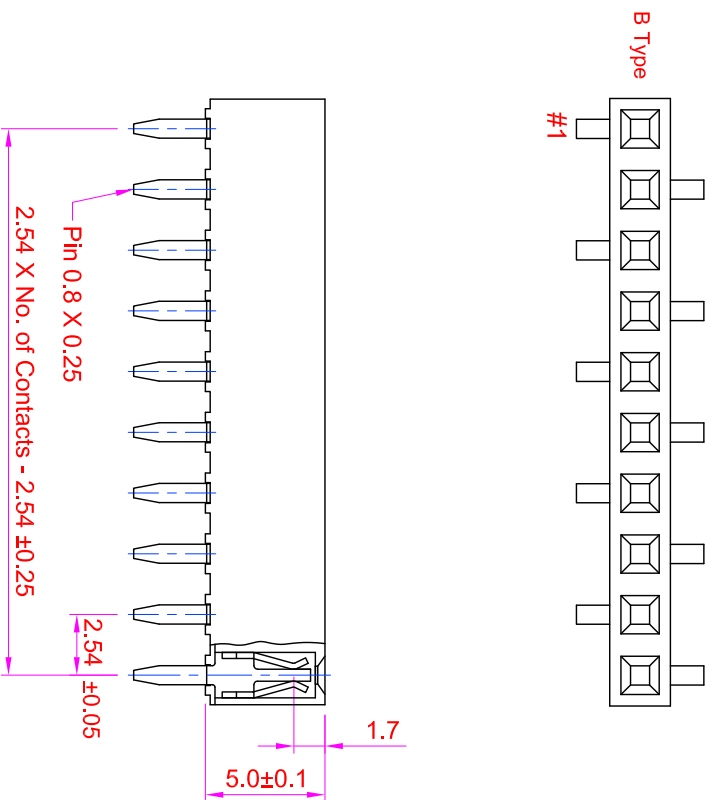


ROHS

Recommended

P.C. Board Hole Layout

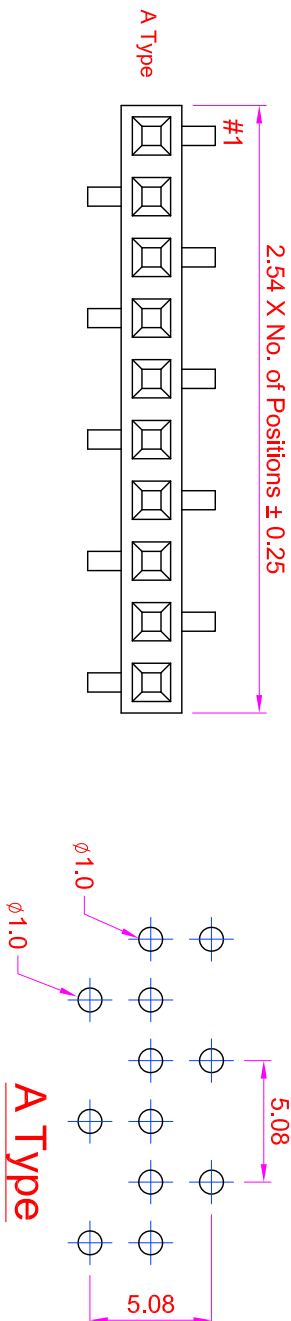

Specifications

- Current Rating : 3 Amps
- Insulator Resistance : 1000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 600V
- Operating Temperature : -40°C ~ +105°C
- Contact Material : Phosphor Bronze
- Insulator Material : Polyester, UL 94V-0 Nylon-9T
- Contact Plated : See Option
- Standard: Full Gold Flash

Order Information

FHA9 - S 1 XX - 0 X XX

- Serial No. _____
- Terminal Type _____
- S : Straight Type
- Row Type _____
- 1 : Single Row
- No. of Contact Per Row _____
- Pin Layout Type _____
- A: A-Type
- B: B Type
- Contact Plated _____

Contact Plating Option	Full Gold Plating	Gold Plating On Contact Area Tin Plating On Solder Area	Full Tin Plating
	GA : Gold Flash GC : Gold 100u" GD : Gold 150u" GE : Gold 300u"	SA : Gold Flash SC : Gold 100u" SD : Gold 150u" SE : Gold 300u"	TA : Tin 1000u"

GENERAL TOLERANCE		單位 (UNIT)	
X. ± 0.50	X. ° ± 5°	mm	
.X ± 0.20	.X ° ± 2°	審核 (APPROVAL)	Alice
.XX ± 0.10	.XX ° ± 1°	校對 (CHECKED)	Mary
DATE:2011/05/18	SCM1	製圖 (DRAWING)	Fen-Fen

料號 (PART NO.)	FHA9-S1XX-0XXXX-X
圖號 (DWG NO.)	FHA9-S1XX

比例 (SCALE)	3:1	張數 (SHEET)	1/1
布法 (PROJ.)		型號 (REV.)	A

宏允企業有限公司
 IO PARTS Enterprise Co., Ltd.
 名稱 (TITLE): Female Header P-2.54 x 2.54 mm
 Profile : 5.0mm, Bottom Entry Type, Single Row