
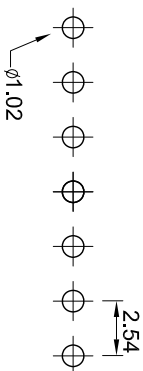


ROHS

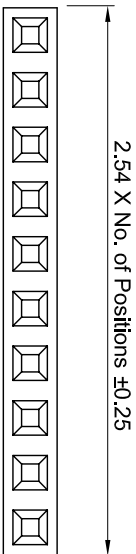



Recommended P.C. Board Hole Layout

- Specifications**
- Current Rating : 3 Amps
 - Insulator Resistance : 1000 Megohms min.
 - Contact Resistance : 20 m ohms max.
 - Dielectric Withstanding : AC 600V
 - Operating Temperature : -40° C ~ +105° C
 - Contact Material : Phosphor Bronze
 - Insulator Material : Polyester, UL 94V-0 Nylon-6T
 - Contact Plated : See Option
 - Standard: Full Gold Flash

Order Information

FHAA - S 1 XX - 0 0 XX

- Serial No. _____
- Terminal Type _____
- S : Straight Type
- Row Type _____
- 1 : Single Row
- No. of Contact Per Row _____
- Contact Plated _____

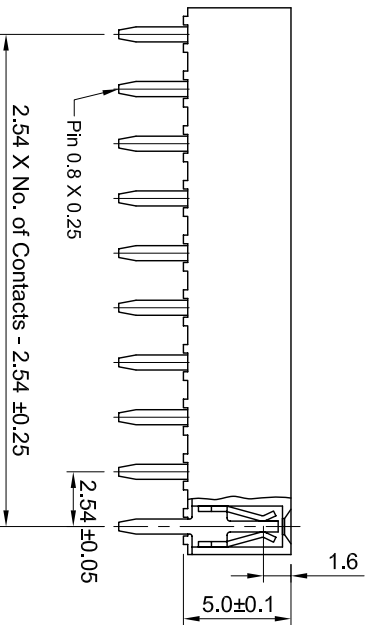

Contact Plating Option	Full Gold Plating	Gold Plating On Contact Area Tin Plating On Solder Area	Full Tin Plating
	GA : Gold Flash GC : Gold 10u" GD : Gold 15u" GE : Gold 30u"	SA : Gold Flash SC : Gold 10u" SD : Gold 15u" SE : Gold 30u"	TA : Tin 100u"

GENERAL TOLERANCE		單位 (UNIT)
X. ± 0.50	X. ° ± 5°	mm
.X ± 0.20	.X ° ± 2°	審核 (APPROVAL)
.XX ± 0.10	.XX ° ± 1°	Alice
DATE:2010/07/01	SCM1	料號 (PART NO.)

FHAA-S1XX-00XX	製圖 (DRAWN)	Fen-Fen
核對 (CHECKED)	Mary	

FHAA-S1XX	圖號 (DWG NO.)	比例 (SCALE)	3:1
1/1	張數 (SHEET)	頁次 (REV.)	B

互允企業有限公司
IO PARTS Enterprise Co., Ltd.

名稱 (TITLE) : Female Header P2.54mm
Profile : 5.0mm, Single Row, Straight Type

Rev	Modification	Date	Drawn
B	Remove Insulator +0.4mm	2010/07/01	Fen-Fen