

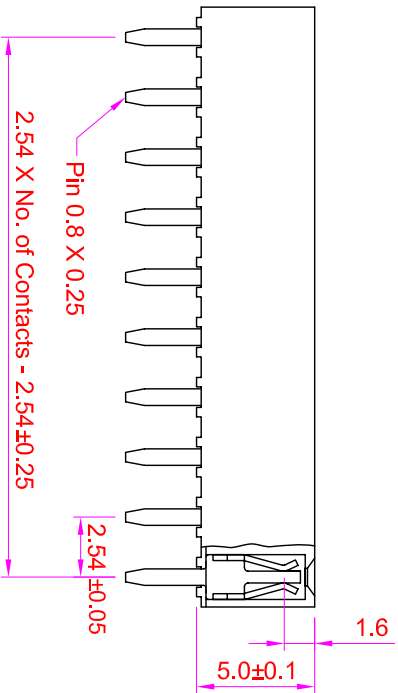
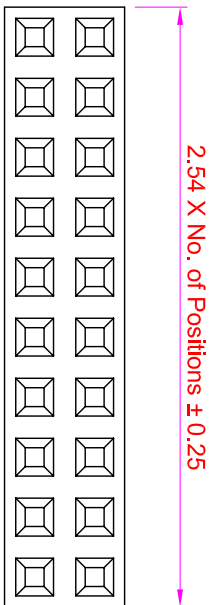


ROHS



**Recommended
P.C. Board Hole Layout**



Rev	Modification	Date	Validate
B	Remove Insulator+0.4mm	2010/07/01	Fen-Fen

Specifications


Current Rating : 3 Amps
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 600V
 Operating Temperature : -40° C ~ +105° C
 Contact Material : Phosphor Bronze
 Insulator Material : Polyester, UL 94V-0 Nylon-6T
 Contact Plated : See Option / Standard: Full Gold

Order Information

FHAA - S 2 XX - 0 0 XX

Serial No. _____
 Terminal Type _____
 S : Straight Type
 Row Type _____
 2 : Dual Row
 No. of Contacts Per Row _____
 Contact Plated _____

Contact Plating Option	Full Gold Plating	Gold Plated On Contact Area Tin Plated On Solder Area	Full Tin Plating
GA : Gold Flash GC : Gold 10u" GD : Gold 15u" GE : Gold 30u"	SA : Gold Flash SC : Gold 10u" SD : Gold 15u" SE : Gold 30u"	TA : Tin 100u"	

GENERAL TOLERANCE		單位 (UNIT)	料號 (PART NO.)	圖號 (DWG NO.)	比例 (SCALE)	張數 (SHEET)	名稱 (TITLE)
X. ± 0.50	X. ° ± 5°	mm	FHAA-S2XX-00XX	FHAA-S2XX	3:1	1/1	 宏允企業有限公司 IO PARTS Enterprise Co., Ltd.
.X X ± 0.20	.X ° ± 2°	Alice	核對 (CHECKED) Mary	製圖 (DRAWN) Fen-Fen	修改 REV.	B	
.X X ± 0.10	.X X ° ± 1°	DATE:2010/07/01	SCM1	SCALE PROL.			Female Header P:2.54 X 2.54mm Profile : 5.0mm, Dual Rows, Straight Type