

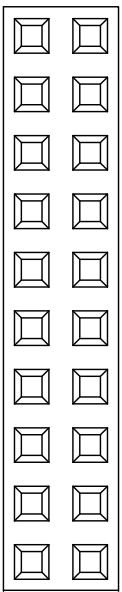



ROHS

2.54 X No. of Positions ± 0.35

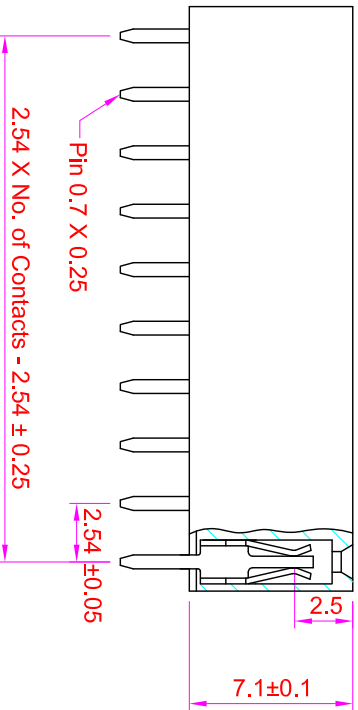

**Recommended
P.C. Board Hole Layout**



- Specifications**
- Current Rating : 3 Amps
 - Insulator Resistance : 1000 Megohms min.
 - Contact Resistance : 20 m ohms max.
 - Dielectric Withstanding : AC 600V
 - Operating Temperature : -40°C ~ +105°C
 - Contact Material : Phosphor Bronze
 - Insulator Material : Polyester, UL 94V-0 Nylon-9T
 - Contact Plated : See Option
 - Standard: Full Gold Flash

Order Information

FHAB - S 2 XX - 0 0 XX

- Serial No. _____
- Terminal Type _____
- S : Straight Type
- Row Type _____
- 2 : Dual Row
- No. of Contact Per Row _____
- Contact Plated _____

Contact Plating Option	Full Gold Plating	Gold Plating On Contact Area Tin Plating On Solder Area	Full Tin Plating
GA : Gold Flash GC : Gold 10u" GD : Gold 15u" GE : Gold 30u"	SA : Gold Flash SC : Gold 10u" SD : Gold 15u" SE : Gold 30u"	TA : Tin 100u"	

GENERAL TOLERANCE		單位 (UNIT)	料號 (PART NO.)	圖號 (DWG NO.)	比例 (SCALE)	張數 (SHEET)	名稱 (TITLE)
X. ± 0.50	X. ° ± 5°	mm	FHAB-S2XX-00XX	FHAB-S2XX	3:1	1/1	IO PARTS 企業有限公司 Female Header P:2.54 X 2.54mm
.X ± 0.20	.X ° ± 2°		審核 (CHECKED)	製圖 (DRAWN)	方法 (PROJ.)	更改 (REV.)	Profile : 7.1mm, Dual Row, Straight Type
.X X ± 0.10	.X X ° ± 1°	Alice	Mary	Fen-Fen	◎	A	
DATE:2010.12.01	SCM1						

