



ROHS

2.54 X No. of Positions ± 0.35



3.3 ± 0.1

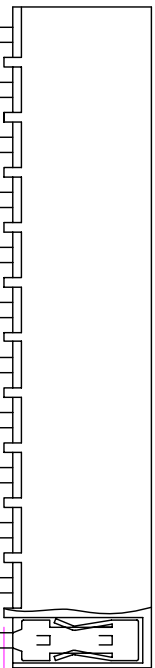


2.54 X No. of Contacts - 2.54

Pin 0.7X0.2

2.54 ± 0.05

6.8 ± 0.2


Recommended
P.C. Board Hole Layout



2.54

ø1.02

3.3 ± 0.1



3.5 ± 0.2

Specifications

- Current Rating : 3 Amps
- Insulator Resistance : 1000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 600V
- Operating Temperature : -40°C ~ +105°C
- Contact Material : Phosphor Bronze
- Insulator Material : Polyester, UL 94V-0 P.B.T.
- Contact Plated : See Option
- Standard: Full Gold Flash

Order Information

FHAG - S 1 XX - X 0 XX -BT

Serial No. _____

Terminal Type _____

S : Straight Type

Row Type _____

1 : Single Row

No. of Contact per Row _____

Insulator Material Option _____

0 : P.B.T. (Standard)

N : Nylon-6T

Contact Plated _____

Packing Option _____

T : Tube

Contact Plating Option	Full Gold Plating	Gold Plating On Contact Area Tin Plating On Solder Area	Full Tin Plating
GA : Gold Flash GC : Gold 10u" GD : Gold 15u" GE : Gold 30u"	SA : Gold Flash SC : Gold 10u" SD : Gold 15u" SE : Gold 30u"	TA : Tin 100u"	

GENERAL TOLERANCE

單位 (UNIT)

料號 (PART NO.)

圖號 (DWG NO.)

比例

張數

1/1

名稱 (TITLE):

IO PARTS Enterprise Co., Ltd.

Female Header P2.54mm

Profile : 6.8mm, Single Row, Straight Type

X. ± 0.50

X. ° ± 5°

FHAG-S2XX-X0XX-BT

FHAG-S2XX

3:1

1/1

IO

Female Header P2.54mm

Female Header P2.54mm

Profile : 6.8mm, Single Row, Straight Type

.X X ± 0.20

.X ° ± 2°

Mary

角法

更改

A

IO

Female Header P2.54mm

Female Header P2.54mm

Profile : 6.8mm, Single Row, Straight Type

.X X ± 0.10

.X X ° ± 1°

Fen-Fen

PRO.

REV.

A

IO

Female Header P2.54mm

Female Header P2.54mm

Profile : 6.8mm, Single Row, Straight Type

DATE:2011.07.22

SCMT1

Mary

角法

更改

A

IO

Female Header P2.54mm

Female Header P2.54mm

Profile : 6.8mm, Single Row, Straight Type