

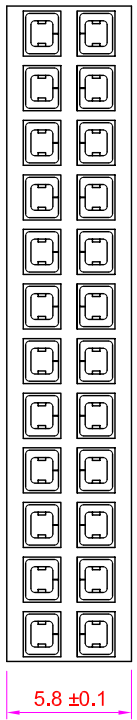
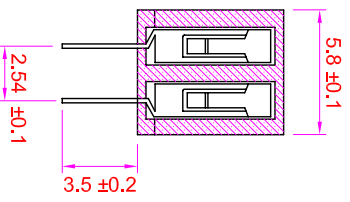


ROHS

2.54 X No. of Positions ± 0.35

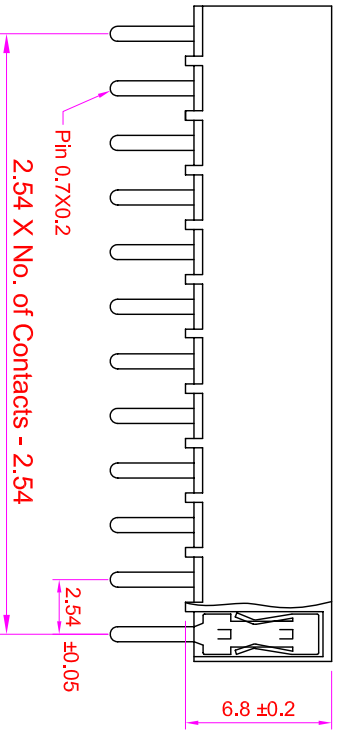

**Recommended
P.C. Board Hole Layout**

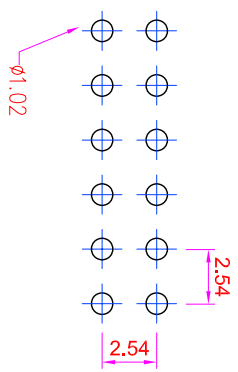

- Specifications**
- Current Rating : 3 Amps
 - Insulator Resistance : 1000 Megohms min.
 - Contact Resistance : 20 m ohms max.
 - Dielectric Withstanding : AC 600V
 - Operating Temperature : -40° C ~ +105° C
 - Contact Material : Phosphor Bronze
 - Insulator Material : Polyester, UL 94V-0 P.B.T.
 - Contact Plated : See Option
 - Standard: Full Gold Flash

Order Information

- FHAG - S 2 XX - X 0 XX -B T
- Serial No. _____
- Terminal Type _____
- S : Straight Type
- Row Type _____
- 2 : Dual Row
- No. of Contact per Row _____
- Insulator Material Option _____
- 0 : P.B.T. (Standard)
- N : Nylon-6T
- Contact Plated _____
- Packing Option _____
- T : Tube

Contact Plating Option	Full Gold Plating	Gold Plating On Contact Area Tin Plating On Solder Area	Full Tin Plating
GA : Gold Flash GC : Gold 10u" GD : Gold 15u" GE : Gold 30u"	SA : Gold Flash SC : Gold 10u" SD : Gold 15u" SE : Gold 30u"	TA : Tin 100u"	

GENERAL TOLERANCE		單位 (UNIT)	料號 (PART NO.)	圖號 (DWG NO.)	名稱 (TITLE)
X. ± 0.50	X. ° ± 5°	mm	FHAG-S2XX-X0XX-BT	FHAG-S2XX	IO PARTS Enterprise Co., Ltd.
.X ± 0.20	.X ° ± 2°		審核 (APPROVAL)	比例 (SCALE)	3:1
.XX ± 0.10	.XX ° ± 1°	Alice	檢對 (CHECKED)	張數 (SHEET)	1/1
DATE:2011.07.22	SCM1	Mary	製圖 (DRAWN)	更改 (REV.)	A
		Fen-Fen	圖法 (PROJ.)		
					Female Header P2.54mm Profile : 6.8mm, Dual Row, Straight Type

IO PARTS Enterprise Co., Ltd.

A B C D E F G H I J

J I H G F E D C B A

1 2 3 4 5 6 7 8 9 10 11 12