



ROHS

**Recommended
P.C. Board Hole Layout**


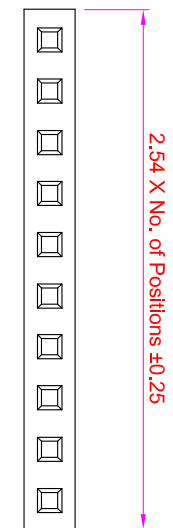


- Specifications**
- Current Rating : 3 Amps
 - Insulator Resistance : 1000 Megohms min.
 - Contact Resistance : 20 m ohms max.
 - Dielectric Withstanding : AC 600V
 - Operating Temperature : -40°C ~ +105°C
 - Contact Material : Phosphor Bronze
 - Insulator Material : Polyester, UL 94V-0 Nylon-9T
 - Contact Plated : See Option
 - Standard: Full Gold Flash

Order Information

FHAH - S 1 XX - 0 0 XX - XX

- Serial No. _____
- Terminal Type _____
- S : Straight Dip Type
- Row Type _____
- 1 : Single Row
- No. of Contact per Row _____
- Contact Plated _____
- Cap Option _____
- Blank: No Cap
- Packing Method _____
- Blank : Tray
- T : In Tube

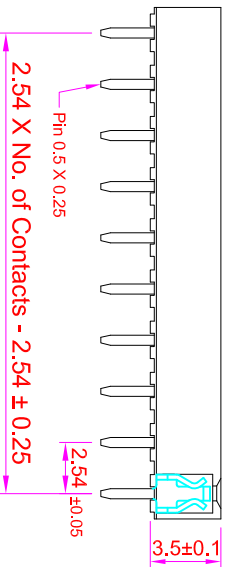


Contact Plating Option	Full Gold Plating	Gold Plating On Contact Area Tin Plating On Solder Area	Full Tin Plating
	GA : Gold Flash GC : Gold 10u" GD : Gold 15u" GE : Gold 30u"	SA : Gold Flash SC : Gold 10u" SD : Gold 15u" SE : Gold 30u"	TA : Tin 100u"

GENERAL TOLERANCE	
X. ± 0.50	X. ° ± 5°
.X ± 0.20	.X ° ± 2°
.XX ± 0.10	.XX ° ± 1°
DATE:2017/12/22	SCM1

單位 (UNIT)	料號 (PART NO.)	審核 (APPROVAL)	製圖 (DRAWN)
mm	FHAH-S1XX-00XX-XX	Alice	Fen-Fen

圖號 (DWG NO.)	比例 SCALE	圖號 (DWG NO.)	圖號 (DWG NO.)
FHAH-S1XX-00	3:1	FHAH-S1XX-00	FHAH-S1XX-00


允企業有限公司
 IO PARTS Enterprise Co., Ltd.
 名稱 (TITLE): Female Header P2.54mm
 Profile : 3.5mm, Single Row, 30Contacts Dip Type

Rev	Modification	Date	Drawn