


ROHS

Recommended P.C. Board Hole Layout

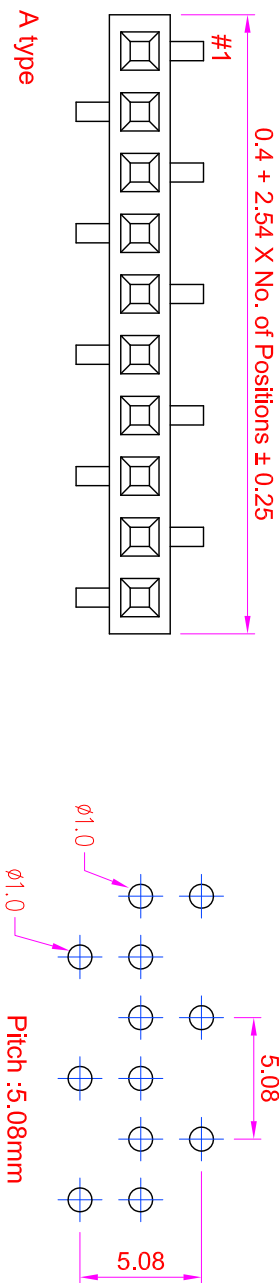


Specifications

- Current Rating : 3 Amps
- Insulator Resistance : 1000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 600V
- Operating Temperature : -40°C ~ +105°C
- Contact Material : Phosphor Bronze
- Insulator Material : Polyester, UL 94V-0 Nylon-9T
- Contact Plated : See Option
- Standard: Full Gold Flash

Order Information

FHAJ - S 1 XX - X X XX

- Serial No. _____
- Terminal Type _____
- S : Straight Type
- Row Type _____
- 1 : Single Row
- No. of Contact Per Row _____
- Pin Layout Type _____
- A: A-Type
- B: B Type
- Pin Type _____
- 2: D=3.96mm
- 3: D=5.08mm
- Contact Plated _____

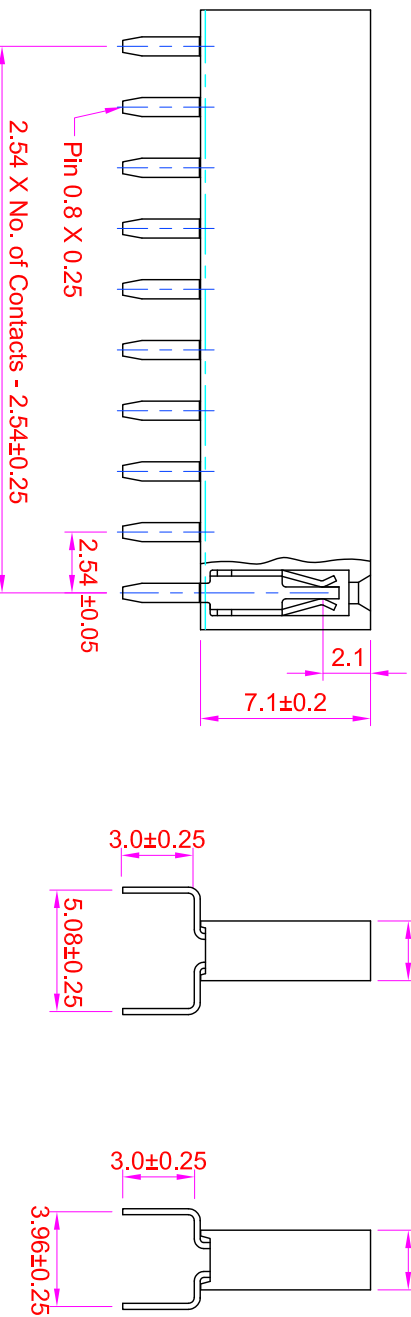

Contact Plating Option	Full Gold Plating	Gold Plating On Contact Area Tin Plating On Solder Area	Full Tin Plating
	GA : Gold Flash GC : Gold 10u" GD : Gold 15u" GE : Gold 30u"	SA : Gold Flash SC : Gold 10u" SD : Gold 15u" SE : Gold 30u"	TA : Tin 100u"

GENERAL TOLERANCE		單位 (UNIT)	料號 (PART NO.)	圖號 (DWG NO.)	比例 (SCALE)	張數 (SHEET)	名稱 (TITLE):
X. ± 0.50	X. ° ± 5°	mm	FHAJ-S1XX-XXXX	FHAJ-S1XX	3:1	1/1	Female Header P-2.54 x 2.54 mm
.X ± 0.20	.X ° ± 2°	審核 (APPROVAL)	檢驗 (CHECKED)	製圖 (DRAWN)	角注 (PROJ.)	更改 (REV.)	Profile : 7.1mm Bottom Entry Type, Single Row
.XX ± 0.10	.XX ° ± 1°	Alice	Mary	Fen-Fen		A	
DATE:2010/1/05	SCM1						

玖允企業有限公司
IO PARTS Enterprise Co., Ltd.