Rev	Modification	Date	Validate

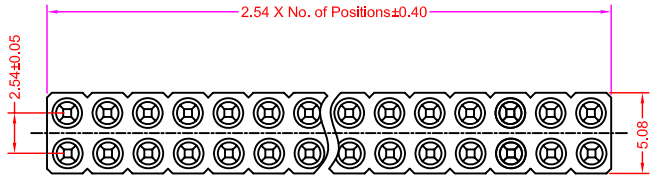

Recommended P.C. Board Hole Layout

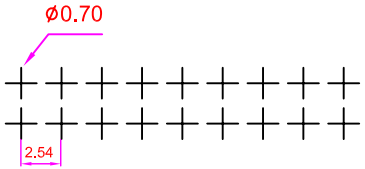

Material:
Pin(outer sleeve): Brass,machined CuZn38Pb2
Plating(outer sleeve):
Tin plated:2um/80u" Ni, 5um/200u" Sn
Gold Plated:2um/80u" Ni,Full gold
Insulator(black): Glass filled thermoplastic polyester UL94V-0
Electrical:
Current rating: 3Amps/contact max.
Contact resistance: ≤4mΩ/contact
Insulation resistance: ≥1000MΩ at V=100V
Operaing voltage: 60VAC/DC
Mechanical:
Operaing temperatures: Gold Plsted:-55 C to+125 C
Tin plated:-40 C to+105 C

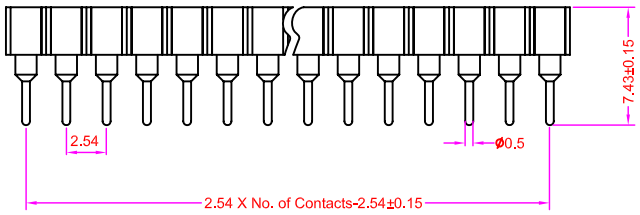



MHA2 - S 2 XX - T2 GA

- Serial No.
- Row Type
  S: Straight Type
- Row Type
  2:Dual Row
- No. of Contact
  02PIN - 40PIN
- Pin Plating Option
  T2: Tin plating 200u"
- Clip Plating Option
  GA:Gold Flash

GENERIAL TOLERANCE		單 位 (UNIT)	料 號 (PART NO.)	圖號 (DWG NO.)		
X . ± 0.50	X . ° ± 5 °	mm	MHA2-S2XX-XXGA	MHA2-S2XX		
. X ± 0.20	. X ° ± 2 °	審核 (APPROVAL)	核對 (CHECKED)	製圖 (DRAWN)	比 例 SCALE Free	張 數 SHEET 1/1
. X X ± 0.10	. X X ° ± 1 °	Alice	Mary	Fen-Fen	角法 PROJ.	更改 REV. A
DATE:2008/03/05	SQM					

站允企業有限公司
IO PARTS Enterprise Co.,Ltd.

名稱 (TITLE): Pitch 2.54 Female Header
Machine Round Pin / Dual Row