

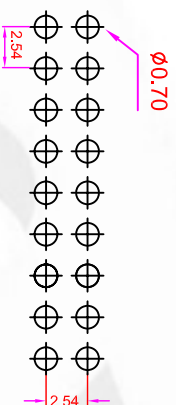
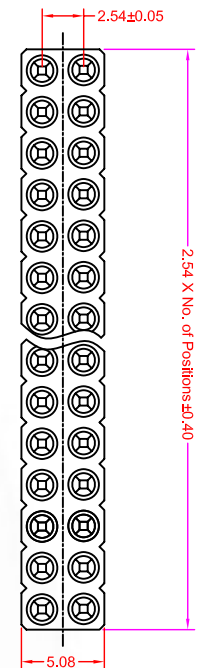


Rev	Modification	Date	Validate

Recommended P.C. Board Hole Layout



Material:
 Pin(outer sleeve): Brass,machined CuZn38Pb2
 Plating(outer sleeve):
 Tin plated:2um/80u" Ni, 5um/200u" Sn
 Gold Plated:2um/80u" Ni,Full gold
 Insulator(black): Glass filled thermoplastic polyester UL94V-0
Electrical:
 Current rating: 3Amps/contact max.
 Contact resistance: $\leq 4m\Omega$ /contact
 Insulation resistance: $\geq 1000M\Omega$ at V=100V
 Operating voltage: 60VAC/DC
Mechanical:
 Operating temperatures: Gold Plsted:-55 C to+125 C
 Tin plated:-40 C to+105 C

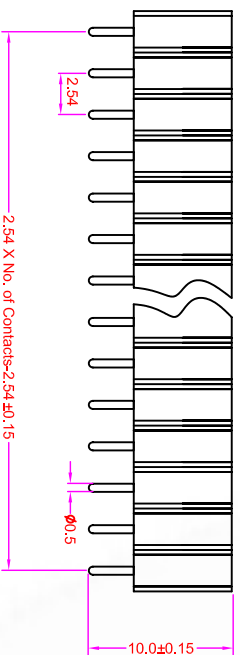

MHA3 - S2XX - T2 GA

Serial No. _____
 Row Type _____
 S: Straight Type
 Row Type _____
 2: Dual Row
 No. of Contact _____
 02PIN - 40PIN
 Pin Plating Option _____
 T2: Tin plating 200u" "
 Clip Plating Option _____
 GA:Gold Flash

GENERAL TOLERANCE		單位 (UNIT)	料號 (PART NO.)	圖號 (DWG. NO.)	比例 (SCALE)	圖法 (PROJ.)	圖號 (DWG. NO.)	比例 (SCALE)	圖法 (PROJ.)	圖號 (DWG. NO.)	比例 (SCALE)	圖法 (PROJ.)
X. ± 0.50	X. ° ± 5°	mm	MHA3-S2XX-XXGA	MHA3-S2XX	Free	Free	MHA3-S2XX	Free	Free	MHA3-S2XX	Free	Free
.X ± 0.20	.X ° ± 2°											
.X X ± 0.10	.X X ° ± 1°											
DATE:20080306	SQM	Alice	Mary	Fen-Fen	Alice	Mary	Fen-Fen	Alice	Mary	Fen-Fen	Alice	Mary

IO 允企業有限公司
 IO PARTS Enterprise Co.,Ltd.

名稱 (TITLE): Pitch 2.54 Female Header H:7.0mm
 Machine Round Pin / Dual Row