


Recommended P.C. Board Hole Layout

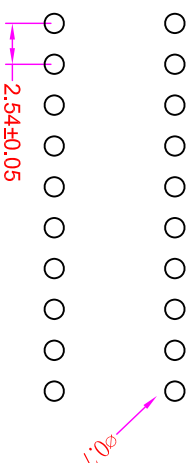

Material:
 Pin(outer sleeve): Brass, machined CuZn38Pb2
 Plating(outer sleeve):
 Tin plated:2um/80u" Ni, 5um/200u" Sn
 Gold Plated:2um/80u" Ni, Full gold
 Insulator(black): Glass filled UL94V-0

Electrical:
 Current rating: 3 Amps/Contact max.
 Contact resistance: ≤4mΩ/contact
 Insulation resistance: ≥1000MΩ at V=100V
 Operating voltage: 60VAC/DC

Order Information

MICS - XX - 3 X T2 GA

Serial No. _____

No. of Contacts _____
 06,08,10,14,16,18,20,22,24,28,32

Bar Option _____
 0: Without Bar
 1: With Bar

Pin Plating Option _____
 T2: Tin plating 200u"

Clip Plating Option _____
 GA: Gold Flash

No. Of Contacts	A	B
6	5.08	7.62
8	7.62	10.16
10	10.16	12.70
12	12.70	15.24
14	15.24	17.78
16	17.78	20.32
18	20.32	22.86
20	22.86	25.40
22	25.40	27.94
24	27.94	30.48
28	33.02	35.56
32	38.10	40.64

GENERAL TOLERANCE		單位 (UNIT)	料號 (PART NO.)	圖號 (DWG NO.)	比例 (SCALE)	圖號 (DWG NO.)	比例 (SCALE)	圖號 (DWG NO.)	比例 (SCALE)
X. ± 0.50	X. ° ± 5°	mm	MICS-XX-3XXXXXX	MICS-XX-3XXXXXX	3:1	MICS-XX-3XXXXXX	3:1	MICS-XX-3XXXXXX	3:1
.X ± 0.20	.X ° ± 2°								
.XX ± 0.10	.XX ° ± 1°								
DATE:2008/03/05	SMR	Alice	Mary	Fen-Fen	PROL	REV.	A		

IE 堃允企業有限公司
 IO PARTS Enterprise Co., Ltd.

IC Socket Pitch: 2.54mm
 Machine Pin / Footprint : 0.3"