

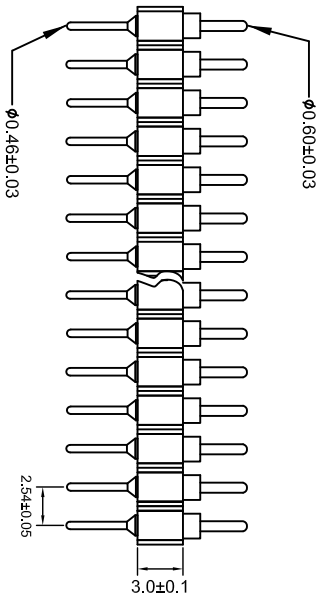
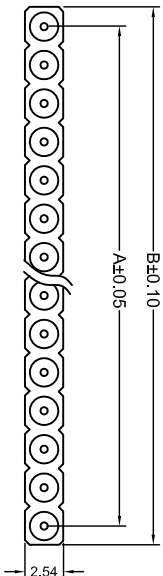


ROHS



Recommended P.C. Board Hole Layout



Specifications
 Current Rating : 3 Amps
 Insulator Resistance : 1000 Megohms min.
 Operating Temperature : -40°C ~ +105°C
 Contact Material : Brass , Machined.C3602
 Insulator Material : PPS, UL 94V-0
 Contact Plated : 80u" Nickel underplated,
 1u" Gold Plated.
 Or 100u" Tin Over Tin Plated.

Order Information

MPA2 - S 1 XX - 00 XX

Serial No. _____

Terminal Type _____

S : Straight Type

Row Type _____

1 : Single Row

No. of Contact Per Row _____

Contact Plated _____

GA: Full Gold Flash Plated (Standard)

TA: Full Tin Plated

No. Of Pins/Row	Dimension		No. Of Pins/Row	Dimension		No. Of Pins/Row	Dimension	
	A	B		A	B		A	B
1	2.54	2.54	11	25.40	27.94	21	50.80	53.34
2	2.54	5.08	12	27.94	30.48	22	53.34	55.88
3	5.08	7.62	13	30.48	33.02	23	55.88	58.42
4	7.62	10.16	14	33.02	35.56	24	58.42	60.96
5	10.16	12.70	15	35.56	38.10	25	60.96	63.50
6	12.70	15.24	16	38.10	40.64	26	63.50	66.04
7	15.24	17.78	17	40.64	43.18	27	66.04	68.58
8	17.78	20.32	18	43.18	45.72	28	68.58	71.12
9	20.32	22.86	19	45.72	48.26	29	71.12	73.66
10	22.86	25.40	20	48.26	50.80	30	73.66	76.20

GENERAL TOLERANCE		單位 (UNIT)		料號 (PART NO.)		圖號 (DWG NO.)	
X. ± 0.50	X. ° ± 5°	mm		MPA2-S1XX-00GA		MPA2-S1XX	
.X ± 0.20	.X ° ± 2°	審核 (APPROVAL)		核對 (CHECKED)		張數 SHEET 1/1	
.XX ± 0.10	.XX ° ± 1°	Alice		Mary		型號 REV. A	
DATE:2015/02/15	SBE	Fen-Fen		PROJ.		名稱 (TITLE): IO PARTS Enterprise Co., Ltd.	
Pin Header 2.54 Machine Pin H:3.0mm Pin Length:11.96mm, Single Row, Straight Type							

Rev	Modification	Date	Validate

IO PARTS Enterprise Co., Ltd.