

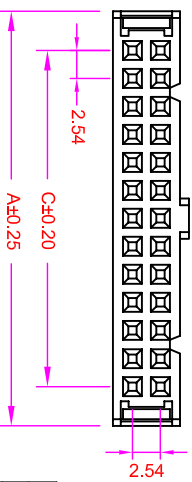

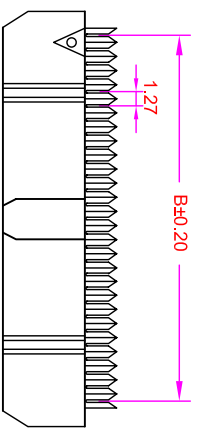

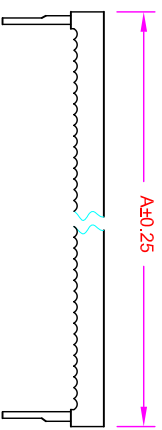



ROHS

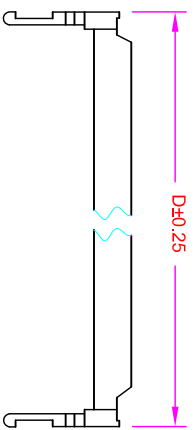

Contact

Rev	Modification	Date	Validate

Specifications

Current Rating : 1 Amp
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 15 m ohms max.
 Dielectric Withstanding : AC 500V
 Operating Temperature : -40°C ~ +105°C
 Contact Material : Phosphor Bronze Or Brass
 Insulator Material : Polyester, UL 94V-0 P.B.T.
 Contact Plated : See Option
 Standard: Full Gold Flash

Order Information

ISA1 - S 0 XX - X X XX

Serial Type _____
 Terminal Type _____
 S: Straight Type
 No. of Contacts _____
 Polarization Bump Option
 0 : W/O Polarization Bump
 1 : W/ Polarization Bump
 Strain Relief Option _____
 0: W/O Strain Relief Option
 1: W/ Strain Relief Option
 Contact Plating
 SA: Selective Gold
 GA: Full Gold
 TA: Full Tin

Pos.	Dim A.	Dim B.	Dim C.	Dim D.	Dim E.	Dim F.	Pos.	Dim A.	Dim B.	Dim C.	Dim D.	Dim E.	Dim F.
6	12.32	6.38	5.08	12.12	13.55	5	26	37.72	31.75	30.48	37.52	13.55	5
8	14.86	8.89	7.62	14.66	13.55	5	30	42.80	36.83	35.56	42.60	13.55	5
10	17.40	11.43	10.16	17.20	13.55	5	34	47.88	41.91	40.64	47.68	13.55	5
12	19.94	13.97	12.70	19.74	13.55	5	36	50.42	44.45	43.18	50.22	13.55	5
14	22.48	16.51	15.24	22.28	13.55	5	40	55.50	49.53	48.26	55.30	13.55	5
16	25.02	19.05	17.78	24.82	13.55	5	44	60.58	54.61	53.34	60.38	13.55	5
18	27.56	21.59	20.32	27.36	13.55	5	50	68.20	62.23	60.96	68.00	13.55	5
20	30.10	24.13	22.86	29.90	13.55	5	60	80.90	74.93	73.66	80.70	13.55	5
24	35.18	29.21	27.94	34.98	13.55	5	64	85.98	80.01	78.74	85.78	13.55	5

GENERAL TOLERANCE		單位 (UNIT)		料號 (PART NO.)		圖號 (DWG NO.)		名稱 (TITLE):	
X ± 0.50	X ° ± 5 °	mm	mm	ISA1-S0XX-XXXX	ISA1-S0XX	1 / 1	1 / 1	IO PARTS Enterprise Co., Ltd.	
.X ± 0.20	.X ° ± 2 °	Alice	Alice	番針 (APPROVAL)	校針 (CHECKED)	製圖 (DRAWN)	電版 (REV)	IDC Socket Pitch : 2.54mm	
.X X ± 0.10	.X X ° ± 1 °	Mary	Mary	Fen-Fen	Fen-Fen	1.0	1.0	Single Contact With Bump type	
2010/09/23	SSJ								

IO PARTS Enterprise Co., Ltd.