

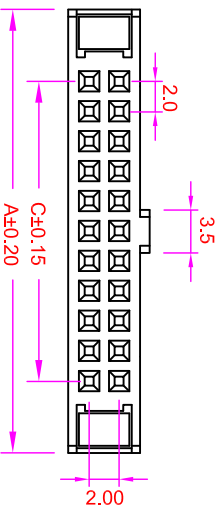

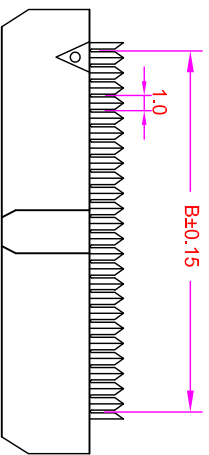

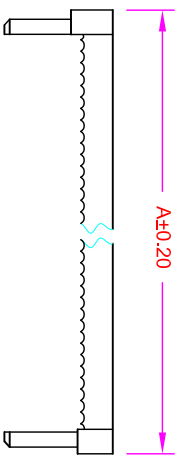



# ROHS

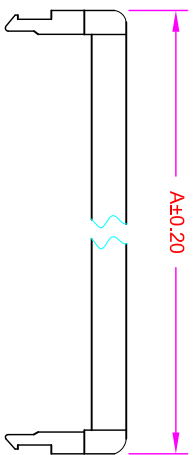

Contact

## Specifications

Current Rating : 1 Amp  
 Insulator Resistance : 1000 Megohms min.  
 Contact Resistance : 10 m ohms max.  
 Dielectric Withstanding : AC 500V  
 Operating Temperature : -40°C ~ +105°C  
 Contact Material : Copper Alloy  
 Insulator Material : Polyester, UL 94V-0 P.B.T.  
 Contact Plated : With Gold or Tin Over Nickle Plated  
 Standard: Selective Gold Flash

## Order Information

ISB1 - S 0 XX - X X XX

Serial Type \_\_\_\_\_  
 Terminal Type \_\_\_\_\_  
 S: Straight Type \_\_\_\_\_  
 No. of Contacts \_\_\_\_\_  
 Polarization Bump Option  
 0 : W/O Polarization Bump  
 1 : W/ Polarization Bump  
 Strain Relief Option \_\_\_\_\_  
 0:W/O Strain Relief Option  
 1: W/ Strain Relief Option  
 Contact Plating  
 SA: Selective Gold

Pos.	Dim A.	Dim B.	Dim C.	Pos.	Dim A.	Dim B.	Dim C.	Pos.	Dim A.	Dim B.	Dim C.
6	11.20	5.00	4.00	24	29.20	23.00	22.00	44	49.20	43.00	42.00
8	13.20	7.00	6.00	26	31.20	25.00	24.00	48	53.20	47.00	46.00
10	15.20	9.00	8.00	28	33.20	27.00	26.00	50	55.20	49.00	48.00
12	17.20	11.00	10.00	30	35.20	29.00	28.00	54	59.20	53.00	52.00
14	19.20	13.00	12.00	32	37.20	31.00	30.00	56	61.20	55.00	54.00
16	21.20	15.00	14.00	34	39.20	33.00	32.00	60	65.20	59.00	58.00
18	23.20	17.00	16.00	36	41.20	35.00	34.00	62	67.20	61.00	60.00
20	25.20	19.00	18.00	38	43.20	37.00	36.00	64	69.20	63.00	62.00
22	27.20	21.00	20.00	40	45.20	39.00	38.00	68	73.20	67.00	66.00

GENERAL TOLERANCE		單位 (UNIT)	料號 (PART NO.)	圖號 (DWG NO.)	名稱 (TITLE):
X. ± 0.50	X. ° ± 5°	mm	ISB1-S0XX-XXXX	ISB1-S0XX	宏允企業有限公司
. X ± 0.20	. X ° ± 2°	審核 (APPROVAL)	檢驗 (CHECKED)	比例 (SCALE)	IO PARTS Enterprise Co., Ltd.
. X X ± 0.10	. X X ° ± 1°	Alice	Mary	Free	IDC Socket Pitch : 2.00mm
2010/09/23	SSJ			張數 (SHEET)	
				1 / 1	
				Rev.	
				Modification	
				Date	
				Validate	