

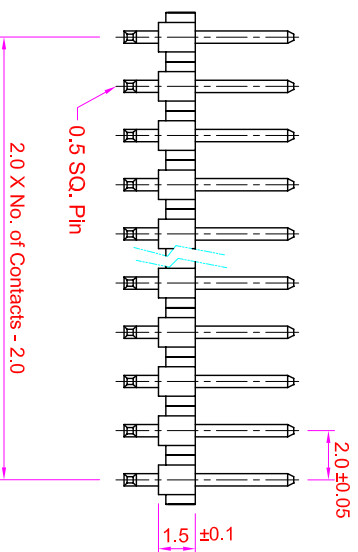


ROHS

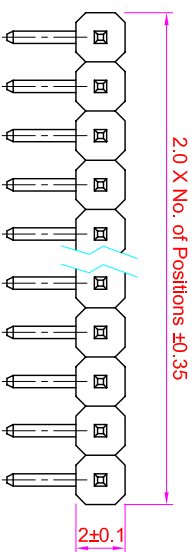

**Recommended
P.C. Board Hole Layout**



Rev	Modification	Date	Validate

Specifications

Current Rating : 2 Amps
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 500V
 Operating Temperature : -40°C ~ +105°C
 Contact Material : Brass
 Insulator Material : Polyester, UL 94V-0 Nylon-6T
 Contact Plated : See Option
 Standard: Full Gold Flash

Order Information

PHB1 - R 1 XX - XX XX
 Serial No. _____
 Terminal Type _____
 R : Right Angle Type
 Row Type _____
 1 : Single Row
 No. of Contact Per Row _____
 Terminal Dim. _____
 01. A=2.8, B=1.15, C=4.0 (Standard)
 02. A=....., C=.....
 03. A=....., C=.....
 Contact Plated _____

Contact Plating Option	Full Gold Plating	Gold Plating On Contact Area TIn Plating On Solder Area	Full Tin Plating
GA : Gold Flash GC : Gold 10u" GD : Gold 15u" GE : Gold 30u"	SA : Gold Flash SC : Gold 10u" SD : Gold 15u" SE : Gold 30u"	TA : Tin 100u"	

GENERAL TOLERANCE		單位 (UNIT)	料號 (PART NO.)	圖號 (DWG NO.)	比例 SCALE	圖號 (DWG NO.)	比例 SCALE	圖號 (DWG NO.)	比例 SCALE
X. ± 0.50	X. ° ± 5°	mm	PHB1-R1XX-XXXX	PHB1-R1XX	3:1	PHB1-R1XX	3:1	PHB1-R1XX	3:1
.X ± 0.20	.X ° ± 2°	mm	PHB1-R1XX-XXXX	PHB1-R1XX	3:1	PHB1-R1XX	3:1	PHB1-R1XX	3:1
.X X ± 0.10	.X X ° ± 1°	mm	PHB1-R1XX-XXXX	PHB1-R1XX	3:1	PHB1-R1XX	3:1	PHB1-R1XX	3:1
DATE:20090305		SSV2	審核 (APPROVAL)	校對 (CHECKED)	製圖 (DRAWN)	所法 (PROJ.)	圖號 (DWG NO.)	比例 SCALE	圖號 (DWG NO.)
Alice		Mary	Fen-Fen						

宏允企業有限公司
 IO PARTS Enterprise Co., Ltd.

名稱 (TITLE): Pin Header P2.0mm
 H:1.5mm, Single Row, Right Angle Type