


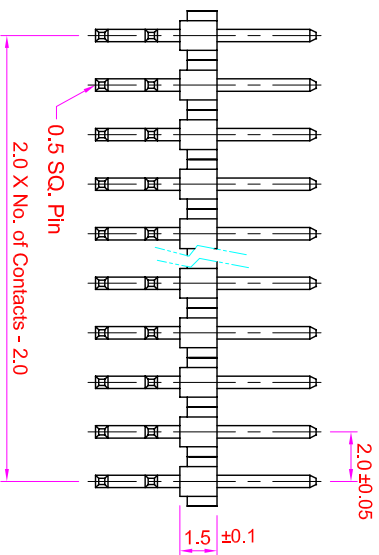


ROHS

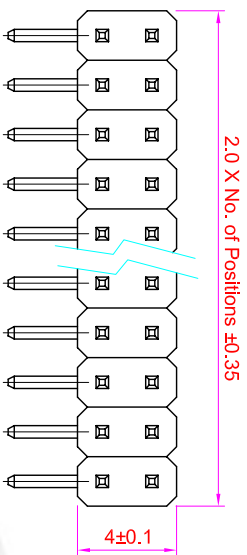

Recommended

P.C. Board Hole Layout

- Specifications**
- Current Rating : 2 Amps
 - Insulator Resistance : 1000 Megohms min.
 - Contact Resistance : 20 m ohms max.
 - Dielectric Withstanding : AC 500V
 - Operating Temperature : -40°C ~ +105°C
 - Contact Material : Brass
 - Insulator Material : Polyester, UL 94V-0 Nylon-6T
 - Contact Plated : See Option
 - Standard: Full Gold Flash

Order Information

- PHB1 - R 2 XX - XX XX
- Serial No. _____
 - Terminal Type _____
 - R : Right Angle Type
 - Row Type _____
 - 2 : Dual Row
 - No. of Contact Per Row _____
 - Terminal Dim. _____
 - 01. A=2.8, B=1.15, C=4.0 (Standard)
 - 02. A=..... C=.....
 - 03. A=..... C=.....
 - Contact Plated _____

Contact Plating Option	Full Gold Plating	Gold Plating On Contact Area Tin Plating On Solder Area	Full Tin Plating
	GA : Gold Flash GC : Gold 10u" GD : Gold 15u" GE : Gold 30u"	SA : Gold Flash SC : Gold 10u" SD : Gold 15u" SE : Gold 30u"	TA : Tin 100u"

GENERAL TOLERANCE		單位 (UNIT)	料號 (PART NO.)	圖號 (DWG. NO.)	名額 (TITLE):	
X. ± 0.50	X. ° ± 5°	mm	PHB1-R2XX-XXXX	PHB1-R2XX	張數	Pin Header P2.0mm
.X ± 0.20	.X ° ± 2°		審核 (CHECKED)	比例	SHEET	H:1.5mm, Dual Row, Right Angle Type
.XX ± 0.10	.XX ° ± 1°		Mary	SCALE	1/1	
DATE:20090305	SNVZ		Fen-Fen	方法	A	
				PROL	REV.	

互允企業有限公司
IO PARTS Enterprise Co., Ltd.