
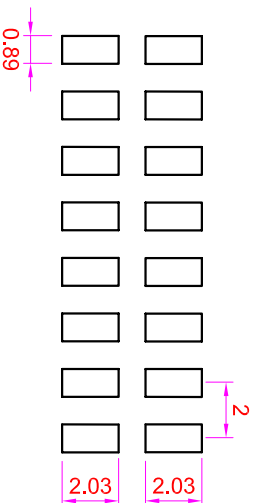


ROHS

Recommended P.C. Board SMD Layout


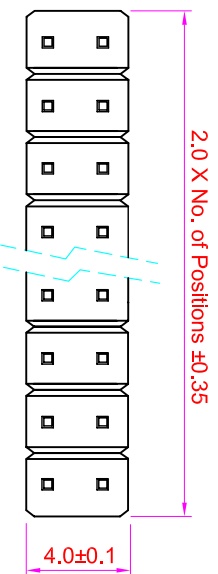


Specifications
 Current Rating : 2 Amps
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 500V
 Operating Temperature : -40° C ~ +105° C
 Contact Material : Brass
 Insulator Material : Polyester, UL 94V-0
 Standard : Nylon-6T
 Contact Plated : See Option / Standard: Full Gold Flash


Order Information

PHB2 - H 2 XX - 0 XX XX - X X

- Serial No. _____
- Terminal Type _____
- H : Horizontal SMT Type
- Row Type _____
- 2 : Dual Rows
- No. of Contact Per Row _____
- Post Option _____
- 0 : Without Post
- Terminal Dim. _____
- 01:C.....
- 02:C.....
- Contact Plated _____
- Cap Option _____
- B : Blank
- P : Plastic Cap
- Packing Method _____
- T :In Tube
- R :Tape & Reel

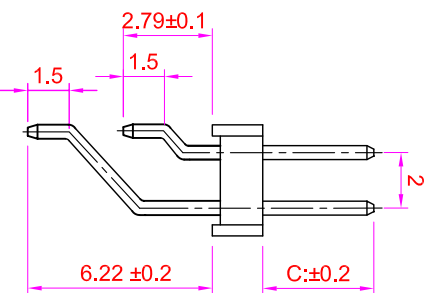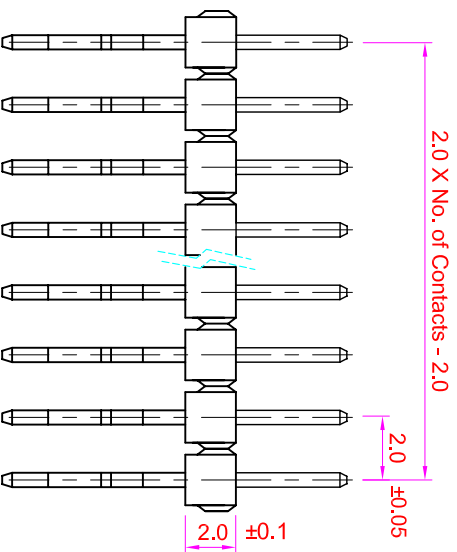

0.5 Square Pin

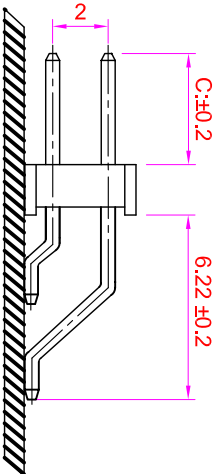

P.C. Board

Contact Plating Option	Full Gold Plating	Gold Plating On Contact Area Tin Plating on solder Area	Full Tin Plating
	GA : Gold Flash GC : Gold 100" GE : Gold 300"	SA : Gold Flash SC : Gold 100" SE : Gold 300"	TA : Tin 100"

玖允企業有限公司
 IO PARTS Enterprise Co., Ltd.

Pin Header P2.0mm
 Dual Rows, Horizontal SMD Type

GENERAL TOLERANCE		單位 (UNIT)	樣號 (PART NO.)	圖號 (DWG NO.)	比例 (SCALE)	圖號 (DWG NO.)	圖號 (DWG NO.)
X. ± 0.50	X. ° ± 5°	mm	PHB2-H2XX-0XXXX-XX	PHB2-H2XX	free	PHB2-H2XX	PHB2-H2XX
.X ± 0.20	.X ° ± 2°		審核 (APPROVAL)	製圖 (DRAWING)	圖號 (DWG NO.)	圖號 (DWG NO.)	圖號 (DWG NO.)
.XX ± 0.10	.XX ° ± 1°		Alice	Fen-Fen	圖號 (DWG NO.)	圖號 (DWG NO.)	圖號 (DWG NO.)
DATD:2009/04/17	SUV-1		Mary	圖號 (DWG NO.)	圖號 (DWG NO.)	圖號 (DWG NO.)	圖號 (DWG NO.)

1 2 3 4 5 6 7 8 9 10 11 12