



Recommended
P.C. Board Hole Layout

Specifications
 Current Rating : 2 Amps
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 500V
 Operating Temperature : -40°C ~ +105°C
 Contact Material : Brass
 Insulator Material : Polyester, UL 94V-0 P.B.T.
 Contact Plated : See Option
 Standard: Full Gold Flash

Order Information

PHB2 - R 2 XX - XX XX

Serial No. _____
 Terminal Type _____
 R : Right Angle Type
 Row Type _____
 2 : Dual Rows
 No. of Contact per Row _____
 Terminal Dim. Type _____
 01. A=2.8, B=1.15, C=4.0(Standard)
 02. A=.....; B=.....; C=.....
 03. A=.....; B=.....; C=.....
 Contact Plated _____

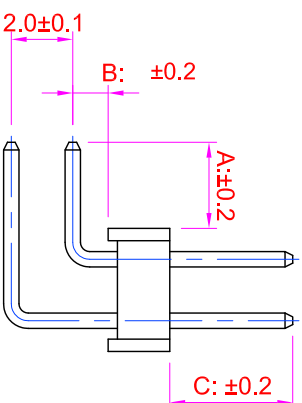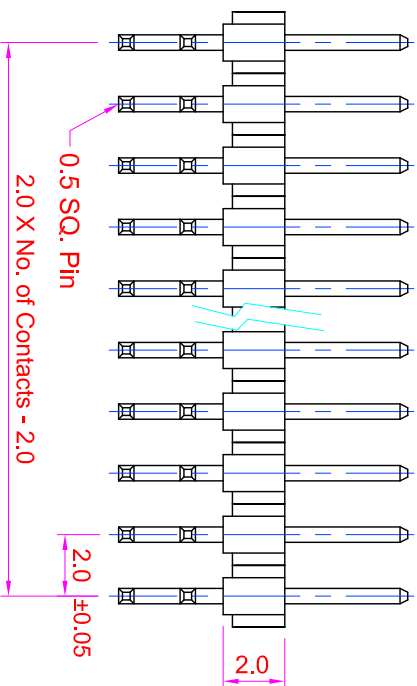

Contact Plating Option	Full Gold Plating	Gold Plating On Contact Area Tin Plating On Solder Area	Full Tin Plating
GA : Gold Flash GC : Gold 10u" GD : Gold 15u" GE : Gold 30u"	SA : Gold Flash SC : Gold 10u" SD : Gold 15u" SE : Gold 30u"	TA : Tin 100u"	

GENERAL TOLERANCE	
X. ± 0.50	X. ° ± 5°
.X ± 0.20	.X ° ± 2°
.XX ± 0.10	.XX ° ± 1°
DATE:2009/07/01	SSV2

單位 (UNIT)	料號 (PART NO.)	檢驗 (CHECKED)	製圖 (DRAWN)
mm	PHB2-R2XX-XXXX	Mary	Fen-Fen
Alice			

圖號 (DWG NO.)	比例 (SCALE)	張數 (SHEET)
PHB2-R2XX	3:1	1/1
布法 (PROJ.)	更改 (REV.)	A

名額 (TITLE):
玖允企業有限公司
 IO PARTS Enterprise Co., Ltd.
 Pin Header P2.0mm
 Dual Rows, Right Angle Type