

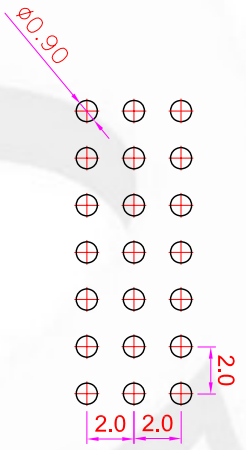
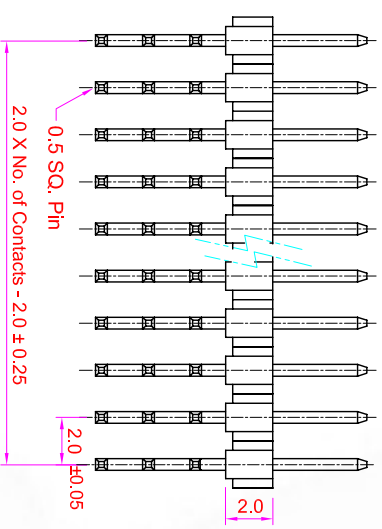


ROHS

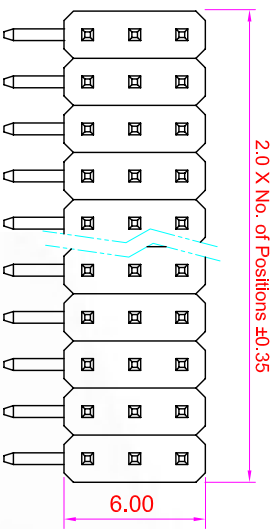

Recommended
P.C. Board Hole Layout

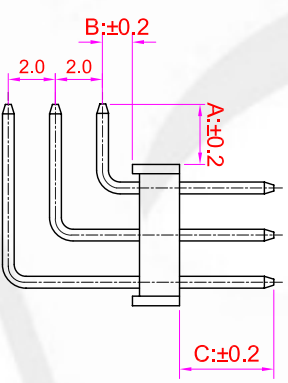

Rev	Modification	Date	Validate

Specifications

- Current Rating : 2 Amps
- Insulator Resistance : 1000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 500V
- Operating Temperature : -40°C ~ +105°C
- Contact Material : Brass
- Insulator Material : Polyester, UL 94V-0 Nylon-6T
- Contact Plated : See Option
- Standard: Full Gold Flash

Order Information

PHB2 - R 3 XX - XX XX

- Serial No. _____
- Terminal Type _____
- R : Right Angle Type
- Row Type _____
- 3 : Triple Row
- No. of Contact per Row _____
- Terminal Dim. Type _____
- 01. A=3.0, B=1.5, C= 4.0(Standard)
- 02. A=..., B=..., C=...
- 03. A=..., B=..., C=...
- Contact Plated _____

Contact Plating Option	Full Gold Plating	Gold Plating On Contact Area Thin Plating On Solder Area	Full Thin Plating
GA : Gold Flash GC : Gold 700" GD : Gold 150" GE : Gold 500"	SA : Gold Flash SC : Gold 700" SD : Gold 150" SE : Gold 500"	TA : Thin 1000"	

GENERAL TOLERANCE		單位 (UNIT)	料號 (PART NO.)	圖號 (DWG NO.)	
X. ± 0.50	X. ° ± 5°	mm	PHB2-R3XX-XXXX	PHB2-R3XX	
.X ± 0.20	.X ° ± 2°	審核 (APPROVAL)	相對 (CHECKED)	圖號 (DRAWN)	比例 (SCALE)
.XX ± 0.10	.XX ° ± 1°				
DATE:20080603	SSV1	Alice	Mary	Fen-Fen	看樣 (PROJ.)
			張數 (SHEET) 1/1		
			名稱 (TITLE): H:2.0mm Triple Row, Right Angle Type		

允允企業有限公司
IO PARTS Enterprise Co., Ltd.