



Recommended
P.C. Board Hole Layout

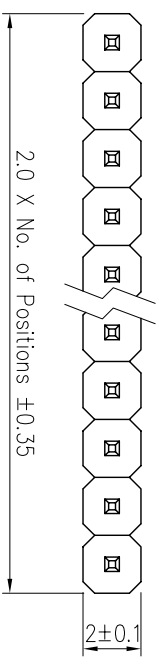



Specifications

- Current Rating : 2 Amps
- Insulator Resistance : 1000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 500V
- Operating Temperature : -40°C ~ +105°C
- Contact Material : Brass
- Insulator Material : Polyester, UL 94V-0 P.B.T.
- Contact Plated : See Option / Standard: Full Gold Flash

Order Information

PHB2 - S 1 XX - XX XX

- Serial No. _____
- Terminal Option _____
- S : Straight Type
- Row Option _____
- 1 : Single Row
- No. of Contact Per Row _____
- Terminal Option _____
- 01, A=2.8mm, C=4.0mm(Standard)
- Contact Plated _____

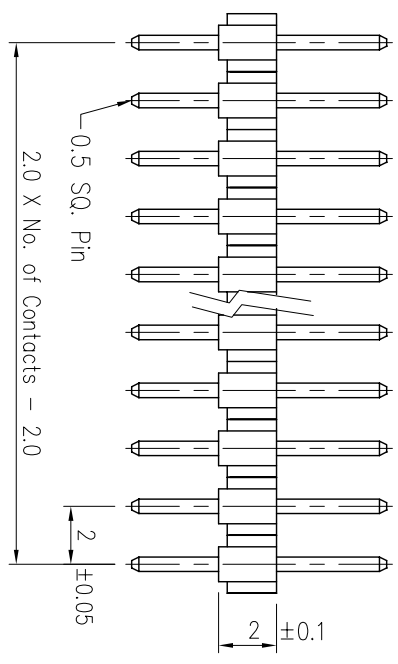

Contact Plating Option	Full Gold Plating	Gold Plated On Contact Area Tin Plated On Solder Area	Full Tin Plating
GA : Gold Flash GO : Gold 100" GE : Gold 300"	SA : Gold Flash SO : Gold 100" SE : Gold 300"	TA : Tin 1000"	

GENERAL TOLERANCE	
X. ± 0.50	X. ° ± 5°
.X ± 0.20	.X ° ± 2°
.XX ± 0.10	.XX ° ± 1°
日期 (DATE)	2008/01/21

單位 (UNIT)	料號 (PART NO.)	圖號 (DWG NO.)	名稱 (TITLE):
mm	PHB2-S1XX-XXXX	PHB2-S1XX	Pin Header Pitch 2.0mm
審核 (APPROVAL)	校對 (CHECKED)	製圖 (DRAWN)	10 PARTS Enterprise Co.,Ltd.
Alice	Mary	Fen-Fen	H:2.0 Single Row, Straight Type
比例 (SCALE)	圖法 (PROJ.)	張數 (SHEET)	1 / 1
4 : 1	更改 (REV.)	1.0	

