
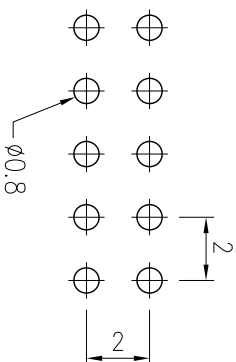


Recommended  
P.C. Board Hole Layout


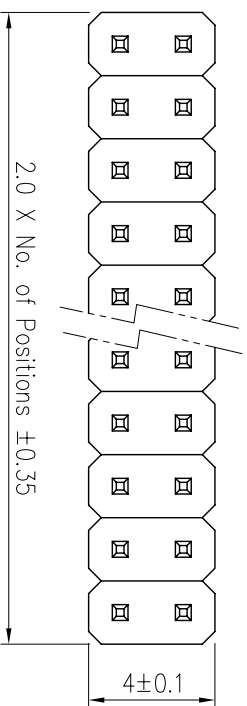


Specifications

Current Rating : 2 Amps  
 Insulator Resistance : 1000 Megohms min.  
 Contact Resistance : 20 m ohms max.  
 Dielectric Withstanding : AC 500V  
 Operating Temperature : -40°C ~ +105°C  
 Contact Material : Brass  
 Insulator Material : Polyester, UL 94V-0  
 Standard : Nylon-6T  
 Contact Plated : Full Gold, Full Tin, Selective Plated

Order Information

PHBA - S 2 XX - XX  
 Serial No. \_\_\_\_\_  
 Terminal Type \_\_\_\_\_  
 S : Straight Type  
 Row Type \_\_\_\_\_  
 2 : Dual Rows  
 No. of Contact per Row \_\_\_\_\_  
 Terminal Dim. Type \_\_\_\_\_  
 1. A=....., B=....., C=.....  
 2. A=....., B=....., C=.....  
 3. A=....., B=....., C=.....  
 Contact Plated \_\_\_\_\_

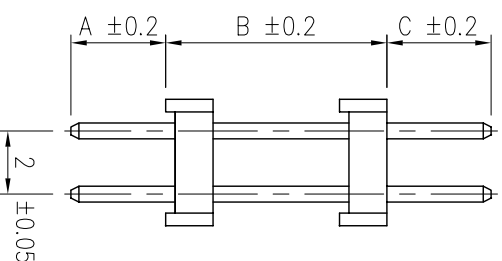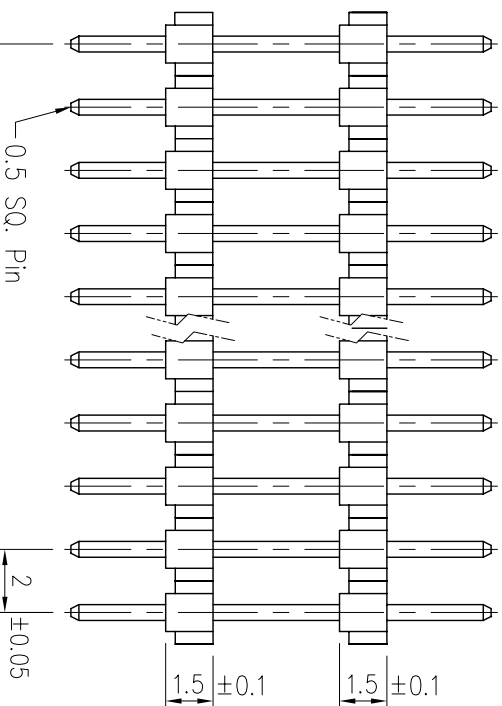

Contact Plating Option	Full Gold Plating	Gold Plating On Contact Area Tin Plating On Solder Area	Full Tin Plating
GA : Gold Flash GC : Gold 10u" GD : Gold 15u" GE : Gold 30u"	SA : Gold Flash SC : Gold 10u" SD : Gold 15u" SE : Gold 30u"	TA : Tin 100u"	

GENERAL TOLERANCE		單位 (UNIT)	料號 (PART NO.)	圖號 (DWG. NO.)	名稱 (TITLE)
X. ± 0.50	X. ± 5°	mm	PHBA-S2XX-XXXX	PHBA-S2XX	IO 允企業有限公司 IO PARTS Enterprise Co., Ltd.
.X ± 0.20	.X ± 2°		審核 (CHECKED)	比例 SCALE	Pin Header P2.0mm
.XX ± 0.10	.XX ± 1°		Mary	4 : 1	Dual Body, Dual Rows, Straight Type
日期 (DATE)	2007/05/17		Fen-Fen	張數 SHEET	
			Alice	1 / 1	
				更改 REV.	
				1.0	