
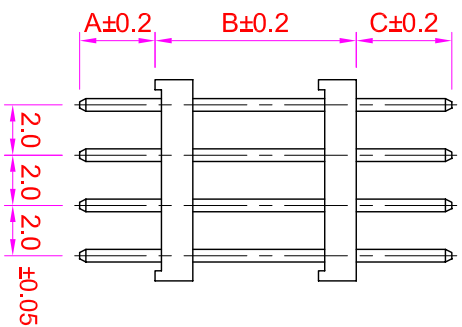
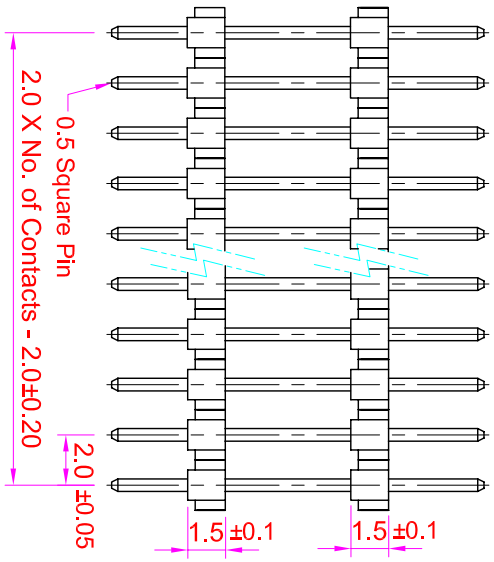
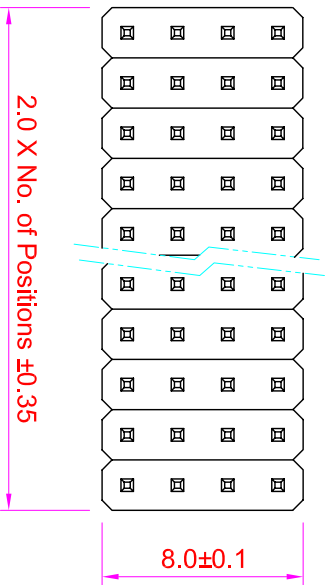


ROHS

Recommended
P.C. Board Hole Layout



| Rev | Modification | Date | Validate |
|-----|--------------|------|----------|
| | | | |

Specifications

- Current Rating : 2 Amps
- Insulator Resistance : 1000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 500V
- Operating Temperature : -40°C ~ +105°C
- Contact Material : Brass
- Insulator Material : Polyester, UL 94V-0 Nylon-6T
- Contact Plated : See Option
- Standard: Full Gold Flash

Order Information

PHBA - S 4 XX - XX XX

- Serial No. _____
- Terminal Type _____
- S : Straight Type
- Row Type _____
- 4 : Quad Row
- No. of Contact Per Row _____
- Terminal Dim. _____
- 01. A=..... B=..... C=.....
- 02. A=..... B=..... C=.....
- 03. A=..... B=..... C=.....
- Contact Plated _____

| Contact Plating Option | Full Gold Plating | Gold Plating On Contact Area Tin Plating On Solder Area | Full Tin Plating |
|---|---|--|------------------|
| GA : Gold Flash GC : Gold 10u" GD : Gold 15u" GE : Gold 30u" | SA : Gold Flash SC : Gold 10u" SD : Gold 15u" SE : Gold 30u" | TA : Tin 100u" | |

| GENERAL TOLERANCE | | 單位 (UNIT) | | 料號 (PART NO.) | | 圖號 (DWG NO.) | | 張數 | | 名稱 (TITLE): | |
|-------------------|------------|-----------------|------|----------------|-----------|--------------|------|----|---|-------------------------------------|--|
| X. ± 0.50 | X. ° ± 5° | mm | mm | PHBA-S4XX-XXXX | PHBA-S4XX | 3:1 | 1/1 | 1 | 1 | Pin Header P2.0mm | |
| .X ± 0.20 | .X ° ± 2° | Alice | Mary | Fen-Fen | SCALE | 3:1 | REV. | A | A | H:1.5mm, Quad Row, Right Angle Type | |
| .XX ± 0.10 | .XX ° ± 1° | DATE:2009/07/17 | SSV2 | | | | | | | | |

坊允企業有限公司
IO PARTS Enterprise Co., Ltd.