
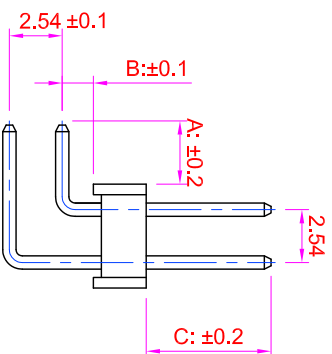
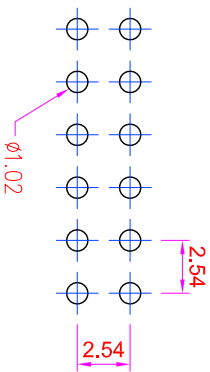
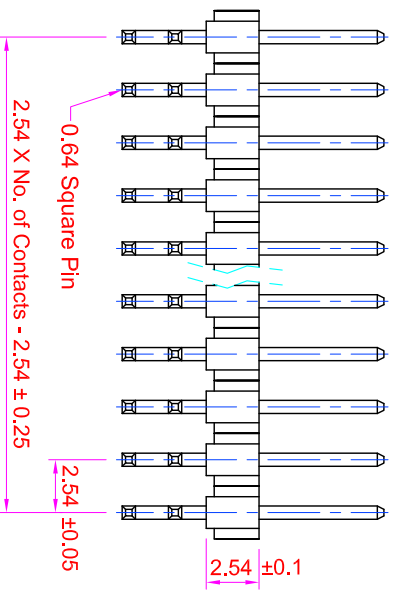


ROHS

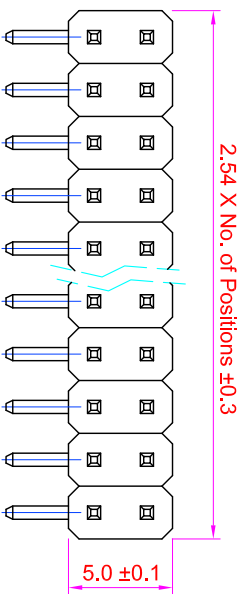

**Recommended
P.C. Board Hole Layout**

- Specifications**
- Current Rating : 3 Amps
 - Insulator Resistance : 1000 Megohms min.
 - Contact Resistance : 20 m ohms max.
 - Dielectric Withstanding : AC 600V
 - Operating Temperature : -40°C ~ +105°C
 - Contact Material : Brass
 - Insulator Material : Polyester, UL 94V-0 P.B.T.
 - Contact Plated : See Option

Order Information

PHA1 - R 2 XX - XX XX

Serial Type _____

Terminal Type _____

R: Right Angle Type

Row Type _____

2 : Dual Row

No. of Pin per Row _____

Terminal Dim. _____

01, A=3.0, B=1.5, C=6.0 (Standard)

Contact Plating _____

Contact Plating Option	Full Gold Plating	Gold Plating On Contact Area Thin Plating On Solder Area	Full Thin Plating
GA : Gold Flash GC : Gold Au" GD : Gold 15u" GE : Gold 30u"	SA : Gold Flash SD : Gold Au" SE : Gold 15u" SF : Gold 30u"	TA : Thin 100u"	

GENERAL TOLERANCE		單位 (UNIT)	
X. ± 0.50	X. ° ± 5°	mm	
. X ± 0.20	. X ° ± 2°		
. . X X ± 0.10	. . X X ° ± 1°		
DATE:2018/02/22	SSV2		

料號 (PART NO.)	審核 (CHECKED)	繪圖 (DRAWN)	單位 (UNIT)
PHA1-R2-XXXX	Mary	Fen-Fen	mm

圖號 (DWG NO.)	比例 (SCALE)	圖法 (METHOD)	圖號 (DWG NO.)
PHA1-R2XX	3:1	PROJ.	

允允企業有限公司
IO PARTS Enterprise Co., Ltd.

名稱 (TITLE): Pin Header Pitch:2.54 X 2.54mm
H:2.5mm, Dual Row, Right Angle Type

Rev	Modification	Date	Validate