
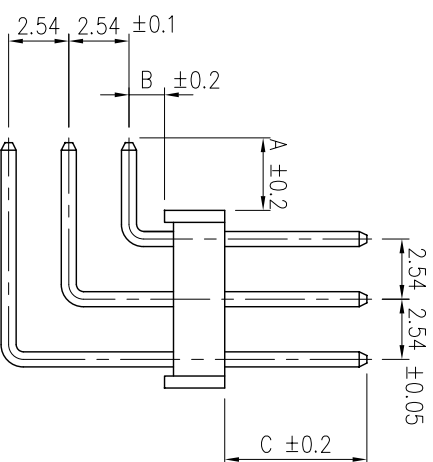


Recommended  
P.C. Board Hole Layout

**Specifications**  
 Current Rating : 3 Amps  
 Insulator Resistance : 1000 Megohms min.  
 Contact Resistance : 20 m ohms max.  
 Dielectric Withstanding : AC 600V  
 Operating Temperature : -40°C ~ +105°C  
 Contact Material : Brass  
 Insulator Material : Polyester, UL 94V-0  
 Standard : Nylon-6T  
 Contact Plated : Full Gold, Full Tin, Selective Plated

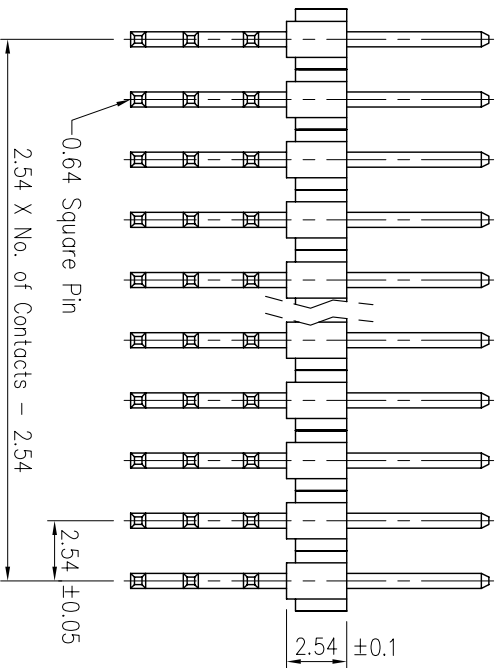

**Order Information**

Serial No. PHA1 - R 3 XX - 0 X XX

Terminal Type

R : Right Angle Type

Row Type

3 : Triple Rows

No. of Contact per Row

Terminal Dim.

1. A=..., B=..., C=...
2. A=..., B=..., C=...
3. A=..., B=..., C=...

Contact Plated

Contact Plating Option	Full Gold Plating	Gold Plating On Contact Area Tin Plating On Solder Area	Full Tin Plating
	GA : Gold Flash GC : Gold 10u" GD : Gold 15u" GE : Gold 30u"	SA : Gold Flash SC : Gold 10u" SD : Gold 15u" SE : Gold 30u"	TA : Tin 100u"

GENERAL TOLERANCE		單位 (UNIT)	料號 (PART NO.)	圖號 (DWG. NO.)	圖法 (PROJ.)	更改 (REV.)	名稱 (TITLE)
X. ± 0.50	X. ± 5°	mm	PHA1-R3XX-0XXXX	PHA1-R3XX	3 : 1	1 / 1	IO 允企業有限公司 IO PARTS Enterprise Co., Ltd.
.X ± 0.20	.X ± 2°		審核 (CHECKED) Mary	製圖 (DRAWN) Fen-Fen	角法 (PROJ.)	1.0	Pin Header P2.54mm Triple Rows, Right Angle Type
.XX ± 0.10	.XX ± 1°		Alice	Fen-Fen			
日期 (DATE)							

更改 (REV)	設備內容 (MODIFICATION)