

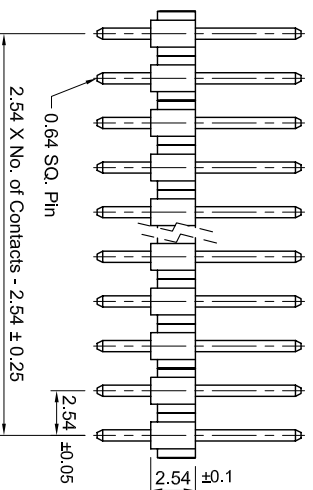



ROHS

Recommended P.C. Board Hole Layout

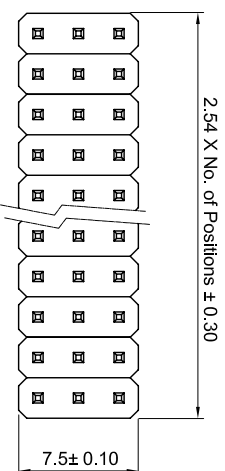

Rev	Modification	Date	Validate

Specifications

Current Rating : 3 Amps
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 600V
 Operating Temperature : -40° C ~ +105° C
 Contact Material : Brass
 Insulator Material : Polyester, UL 94V-0 P.B.T.
 Contact Plated : See Option
 Standard: Full Gold Flash

Order Information

PHA1 - S 3 XX - XX XX - X
 Serial No. _____
 Terminal Type _____
 S : Straight Dip Type
 Row Type _____
 3 : Triple Row
 No. of Contact Per Row _____
 Terminal Dim. _____
 01 : A:3.0mm C:6.0mm
 Contact Plated _____
 Insulator Option _____
 Blank : PBT (Standard)
 N : Nylon 6T

Contact Plating Option	Full Gold Plating	Gold Plating On Contact Area Tin Plating On Solder Area	Full Tin Plating
GA : Gold Flash GC : Gold 10u" GD : Gold 15u" GE : Gold 30u"	SA : Gold Flash SC : Gold 10u" SD : Gold 15u" SE : Gold 30u"	TA : Tin 100u"	

GENERAL TOLERANCE		單位 (UNIT)	料號 (PART NO.)	圖號 (DWG. NO.)	圖名 (TITLE)
X. ± 0.50	X. ° ± 5°	mm	PHA1-S3XX-XXXX-X	PHA1-S3XX	Pin Header P:2.54 X 2.54 mm
.X ± 0.20	.X ° ± 2°	審核 (APPROVAL)	核對 (CHECKED)	製圖 (DRAWN)	名稱 (TITLE):
.XX ± 0.10	.XX ° ± 1°	Alice	Mary	Fen-Fen	H2.54mm, Triple Rows Straight Dip Type
DATE:20090305	SUV-1			比例 (SCALE)	
				3:1	
				印法 (PROJ.)	
				REV. A	


宏允企業有限公司
 IO PARTS Enterprise Co., Ltd.