

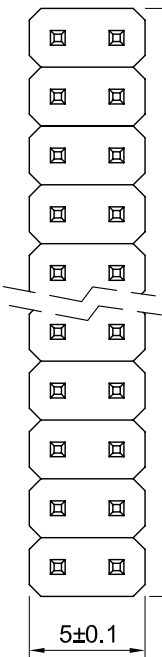
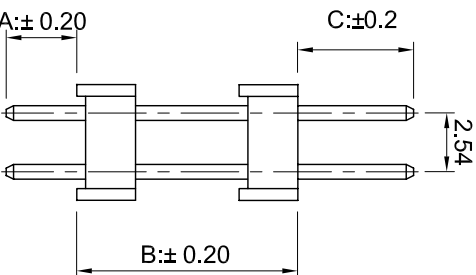


ROHS

2.54 X No. of Positions ± 0.3

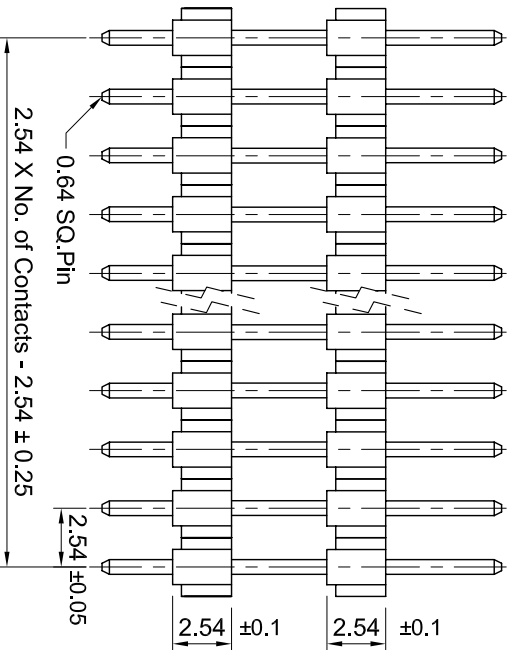

Recommended P.C. Board Hole Layout

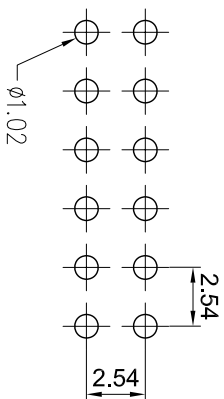

Rev	Modification	Date	Validate

Specifications

- Current Rating : 3 Amps
- Insulator Resistance : 1000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 600V
- Operating Temperature : -40°C ~ +105°C
- Contact Material : Brass
- Insulator Material : Polyester, UL 94V-0 P.B.T.
- Contact Plated : See Option
- Standard: Full Gold Flash

Order Information

PHAA - S 2 XX - XX XX

- Serial Type
- Terminal Type
- S : Staright Type
- Row Type
- 2 : Dual Row
- No. of Pin per Row
- Terminal Dim.
 - 01: A=..., B=..., C=...
 - 02: A=..., B=..., C=...
 - 03: A=..., B=..., C=...
- Contact Plating

Contact Plating Option	Full Gold Plating	Gold Plating On Contact Area Tin Plating On Solder Area	Full Tin Plating
GA : Gold Flash GC : Gold 10u" GD : Gold 15u" GE : Gold 30u"	SA : Gold Flash SC : Gold 10u" SD : Gold 15u" SE : Gold 30u"	TA : Tin 100u"	

GENERAL TOLERANCE		單位 (UNIT)
X. ± 0.50	X. ° ± 5°	mm
.X ± 0.20	.X ° ± 2°	mm (APPROVAL)
.XX ± 0.10	.XX ° ± 1°	Alice
DATE:20080305	SV/1	Mary
		Fen-Fen

料號 (PART NO.)	PHAA-S2XX-XXXX
審核 (CHECKED)	Mary
製圖 (DRAWN)	Fen-Fen

圖號 (DWG NO.)	PHAA-S2XX
比例 (SCALE)	3:1
圖法 (PROJ.)	
張數 (SHEET)	1/1
圖號 (REV.)	A

IE 宏允企業有限公司
IO PARTS Enterprise Co., Ltd.

名稱 (TITLE): Pin Header P:2.54 X 2.54mm
H:2.54mm, Dual Body, Dual Row, Straight Type