
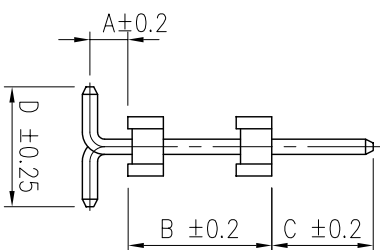
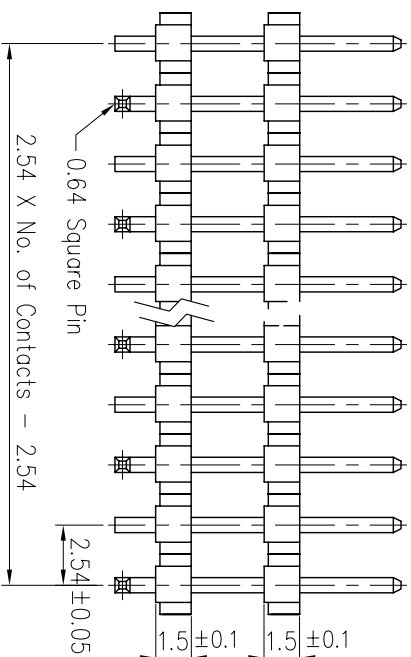
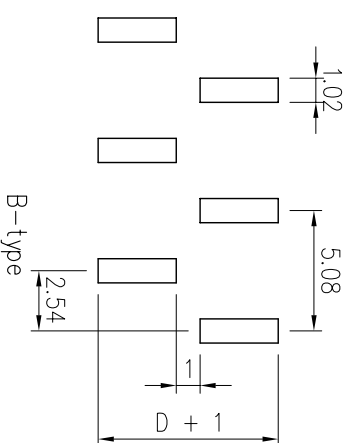
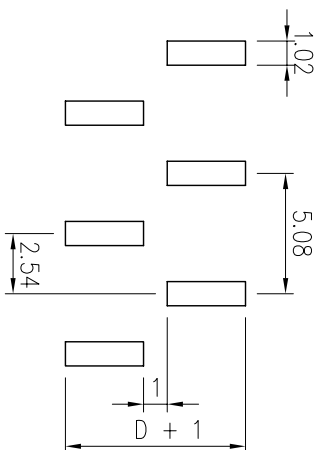
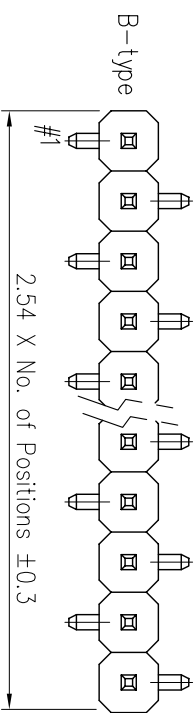


Recommended P.C. Board Layout

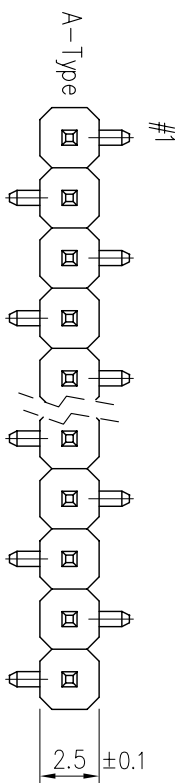

Specifications

Current Rating : 3 Amps
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 600V
 Operating Temperature : -40°C ~ +105°C
 Contact Material : Brass
 Insulator Material : Polyester, UL 94V-0
 Standard : Nylon-6T
 Contact Plated : Full Gold, Full Tin, Selective Plated

Order Information

PHAB - M 1 XX - X X XX - X X
 Serial Type _____
 Terminal Type _____
 M : SMT Type _____
 Row Type _____
 1 : Single Row _____
 No. of Pin per Row _____
 Pin Layout Type _____
 A: A-Type _____
 B: B-Type _____
 Terminal Dim. _____
 1. A=..., B=..., C=..., D=...
 2. A=..., B=..., C=..., D=...
 3. A=..., B=..., C=..., D=...
 Contact Plating _____
 Cap Option _____
 B : Blank _____
 P : Plastic Cap _____
 Packing Method _____
 T : In Tube _____
 R : Tape & Reel _____

Contact Plating Option	Full Gold Plating	Gold Plating On Contact Area Tin Plating On Solder Area	Full Tin Plating
GA : Gold Flash GC : Gold 10u" GD : Gold 15u" GE : Gold 30u"	SA : Gold Flash SC : Gold 10u" SD : Gold 15u" SE : Gold 30u"	TA : Tin 100u"	

GENERAL TOLERANCE	
X . ± 0.50	X . ± 5 .
. X ± 0.20	. X ± 2 .
. X X ± 0.10	. X X ± 1 .

單位 (UNIT)	料號 (PART NO.)	審核 (CHECKED)	製圖 (DRAWN)
mm	PHAB-M1XX-0XXX	Mary	Fen-Fen
審核 (APPROVAL)			
Alice			

圖號 (DWG NO.)	比例 (SCALE)	角法 (PROJ.)
PHAB-M1XX	3 : 1	第一角法

IO 允允企業有限公司
 IO PARTS Enterprise Co., Ltd.
 名稱 (TITLE) : Pin Header P2.54mm H:1.5mm
 Single Row, Dual Body, SMT Type