



Recommended P.C. Board Hole Layout

Specifications
 Current Rating : 3 Amps
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 600V
 Operating Temperature : -40°C ~ +125°C
 Contact Material : Brass
 Insulator Material : Polyester, UL 94V-0 Nylon-6T
 Contact Plated : See Option
 Standard: Full Gold Flash

Order Information

PHA2 - S 2 XX - XX XX

Serial Type _____
 Terminal Type _____
 S : Straight Type
 Row Type _____
 2 : Dual Row
 No. of Pin Per Row _____
 Terminal Dim. _____
 01. A=.....,C=.....
 02. A=.....,C=.....
 03. A=.....,C=.....
 Contact Plating _____

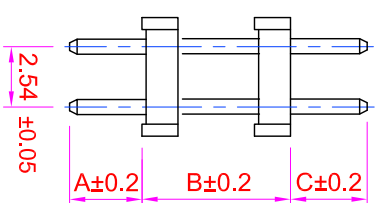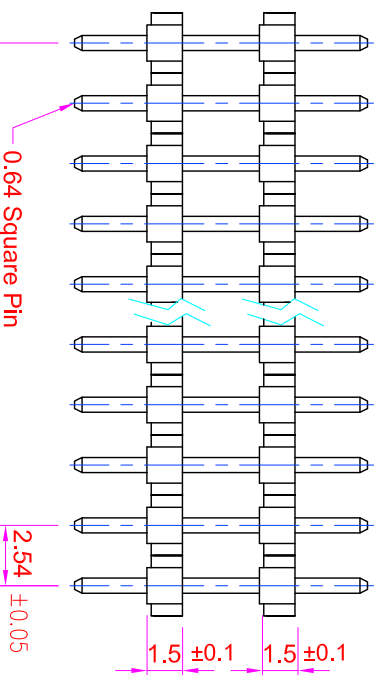

Contact Plating Option	Full Gold Plating	Gold Plating On Contact Area Tin Plating On Solder Area	Full Tin Plating
	GA : Gold Flash GC : Gold 10u" GD : Gold 15u" GE : Gold 30u"	SA : Gold Flash SC : Gold 10u" SD : Gold 15u" SE : Gold 30u"	TA : Tin 100u"

GENERAL TOLERANCE		單位 (UNIT)		料號 (PART NO.)		圖號 (DWG NO.)		名稱 (TITLE):	
X. ± 0.50	X. $\pm 5^\circ$	mm		PHA2-S2XX-XXXX		PHA2-S2XX		IO PARTS Enterprise Co., Ltd.	
.X ± 0.20	.X $\pm 2^\circ$	Alice		Mary		Fen-Fen		Pin Header Pitch: 2.54 X 2.54mm	
.XX ± 0.10	.XX $\pm 1^\circ$	SSVZ		Fen-Fen		REV. A		H: 1.5mm, Dual Row, Straight Type	
DATE: 201009/28									