
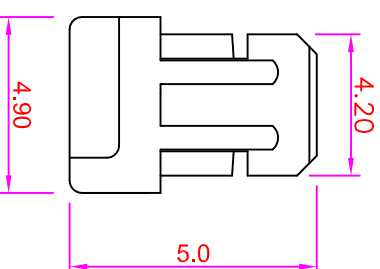
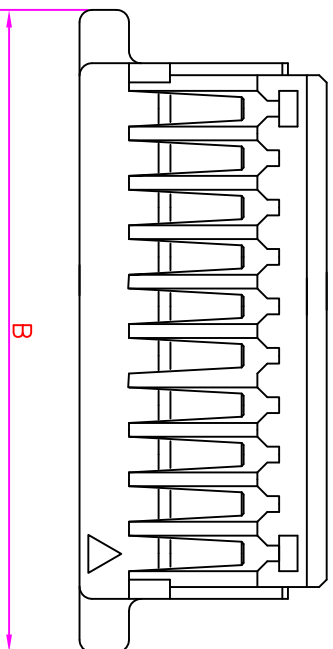


**ROHS**

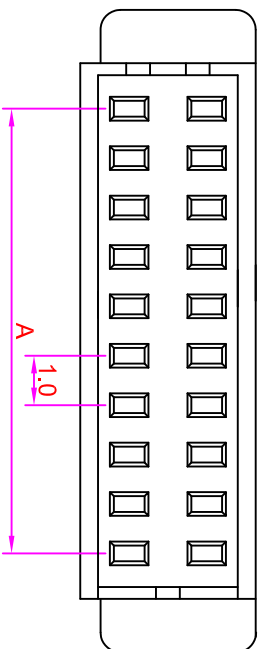

Rev	Modification	Date	Validate

### Specifications

Voltage Rating: 50V(AC)  
 Current Rating: 1.0A  
 Contact Resistance: 20m Ω max.  
 Dielectric Withstanding Voltage: 500V AC/1min.  
 Insulation Resistance: 100MΩ min.  
 Insulator: PBT, UL94V-0  
 Color: Natural

### Order Information

HU1001 - S 2 XX

Serial No. \_\_\_\_\_

Pin Type \_\_\_\_\_


2 : Dual Type

No. of Contacts \_\_\_\_\_

Poles	Dimension mm	
	A	B
20	9.00	13.00
30	14.00	18.00
40	19.00	23.00
50	24.00	28.00

GENERAL TOLERANCE		單位 (UNIT)	
X. ± 0.50	X. ° ± 5°	mm	mm
.X ± 0.20	.X ° ± 2°	Alice	
.XX ± 0.10	.XX ° ± 1°	Mary	
DATE:2019/11/19	SRZ	Fen-Fen	

圖號 (DWG NO.)	料號 (PART NO.)	審核 (APPROVAL)	檢別 (CHECKED)	繪圖 (DRAWN)	比例 (SCALE)	圖號 (DWG NO.)	圖號 (DWG NO.)
HU1001-XX	HU1001-S2XX	Alice	Mary	Fen-Fen	3:1	HU1001-XX	HU1001-XX


**允允企業有限公司**  
 IO PARTS Enterprise Co., Ltd.  
 名稱 (TITLE):  
 Pitch : 1.0 Housing Dual Housing