
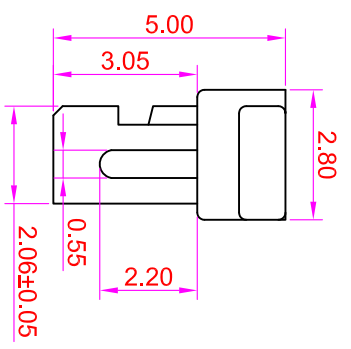
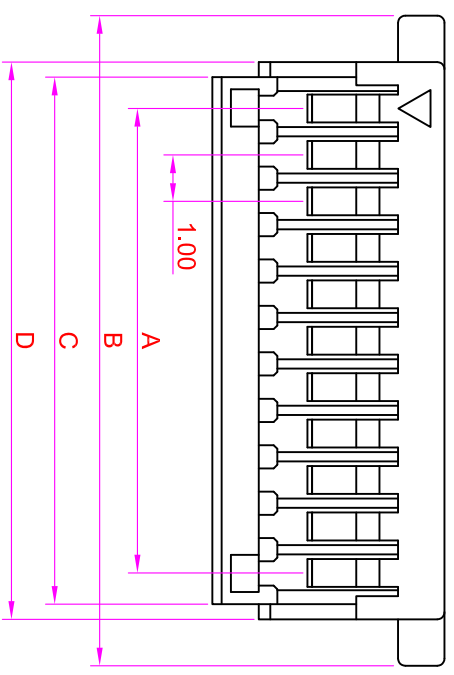


ROHS

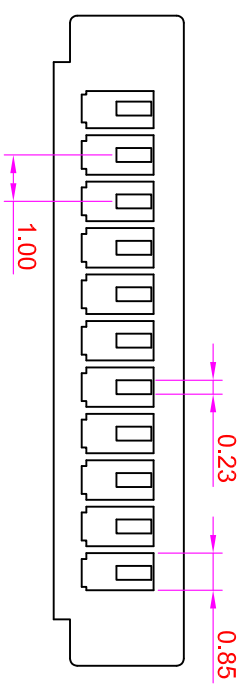

Rev	Modification	Date	Validate

SPECIFICATIONS

Current Rating: 1A AC, DC
 Voltage Rating: 50V AC/ max.
 Operating Temp.: -25°C ~ +85°C
 Insulation Resistance: 100MΩ/ min.
 Dielectric Withstanding Voltage: 500V AC/ min.
 Contact Resistance: 20MΩ/ max.

Material: PBT, UL94V-0

Order Information
HU1001 - XX

Serial No. _____

No. of Contacts _____

Poles	Dimension mm (In.)	
	A	B
2	1.0(0.039)	4.0(0.157)
3	2.0(0.079)	5.0(0.197)
4	3.0(0.118)	6.0(0.236)
5	4.0(0.157)	7.0(0.276)
6	5.0(0.197)	8.0(0.315)
7	6.0(0.236)	9.0(0.354)
8	7.0(0.276)	10.0(0.394)
9	8.0(0.315)	11.0(0.433)
10	9.0(0.354)	12.0(0.472)
11	10.0(0.394)	13.0(0.512)
12	11.0(0.433)	14.0(0.551)
13	12.0(0.472)	15.0(0.591)
14	13.0(0.512)	16.0(0.630)
15	14.0(0.551)	17.0(0.669)
20	19.0(0.748)	22.0(0.866)

GENERAL TOLERANCE		單位 (UNIT)	料號 (PART NO.)	圖號 (DWG NO.)	比例 SCALE	張數 SHEET	名稱 (TITLE):
X. ± 0.50	X. ° ± 5°	mm	HU1001-XX	HU1001-XX	3:1	1/1	Pitch : 1.0 Housing Single Housing
.X ± 0.20	.X ° ± 2°	審核 (APPROVAL)	核對 (CHECKED)	製圖 (DRAWN)	角注 PROJ.	更改 REV.	允允企業有限公司 IO PARTS Enterprise Co.,Ltd.
.XX ± 0.10	.XX ° ± 1°	Alice	Mary	Fen-Fen		A	
DATE:2019/11/19	SBZ						