

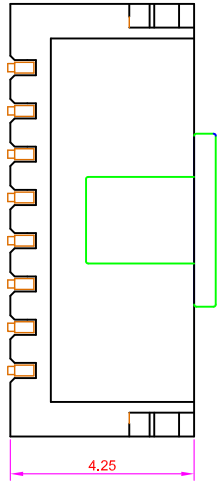
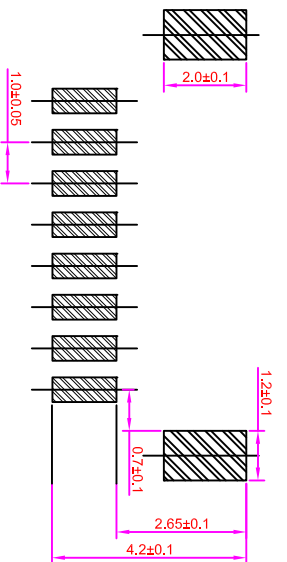


ROHS

**Recommended
P.C. Board SMD Layout**

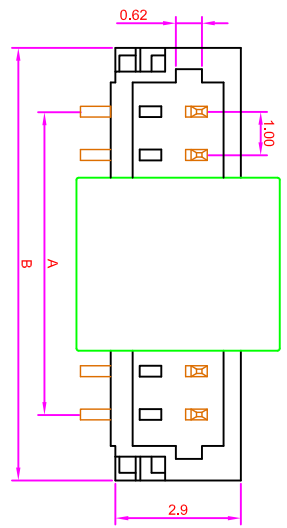

Poles	Dimension mm (in.)	
	A	B
2	1.0(0.039)	4.0(0.157)
3	2.0(0.079)	5.0(0.197)
4	3.0(0.118)	6.0(0.236)
5	4.0(0.157)	7.0(0.276)
6	5.0(0.197)	8.0(0.315)
7	6.0(0.236)	9.0(0.354)
8	7.0(0.276)	10.0(0.394)
9	8.0(0.315)	11.0(0.433)
10	9.0(0.354)	12.0(0.472)
11	10.0(0.394)	13.0(0.512)
12	11.0(0.433)	14.0(0.551)
13	12.0(0.472)	15.0(0.591)
14	13.0(0.512)	16.0(0.630)
15	14.0(0.551)	17.0(0.669)
20	19.0(0.748)	22.0(0.866)

Specifications
 Voltage Rating: 50V(AC)
 Current Rating: 1.0A
 Contact Resistance: 20m Ω max.
 Dielectric Withstanding Voltage: 500V AC/1min.
 Insulation Resistance: 100MΩ min.
 Insulator: High Temperature Plastic UL94V-0
 Color: Natural
 Contact: Phosphor Bronze, Tin-Plated
 Plating: Tin /lead-plated
 Temperature Range: -40 ℃~+105℃

Order Information

WA1001-M 0 XX -V 0 TA - XX

Serial No. _____
 Terminal Type _____
 M : SMD Type _____
 No. of Contact Per Row _____
 Type Option _____
 V : Vertical Type _____
 Contact Plated _____
 Type Option _____
 P : Cap _____
 Type Option _____

T : Tube
 R : Tape & Reel

圖號 (DWG NO.)

WA1001-M0XX



Alice 允企業有限公司
 IO PARTS Enterprise Co., Ltd.
 Pitch : 1.0 Wire To Board
 Vertical SMD Type

單位 (UNIT)

mm

料號 (PART NO.)

WA1001-M0XX-V0TA-XX

圖號 (DWG NO.)

WA1001-M0XX



Alice 允企業有限公司
 IO PARTS Enterprise Co., Ltd.
 Pitch : 1.0 Wire To Board
 Vertical SMD Type

GENERAL TOLERANCE

X. ± 0.50 X. ° ± 5°

.X ± 0.20 .X ° ± 2°

.XX ± 0.10 .XX ° ± 1°

DATE:20080305 SBZ

審核 (APPROVAL)

Alice

檢別 (CHECKED)

Mary

製圖 (DRAWING)

Fen-Fen

比例 SCALE

3:1

張數 SHEET

1/1

名額 (TITLE)

Pitch : 1.0 Wire To Board

Vertical SMD Type