

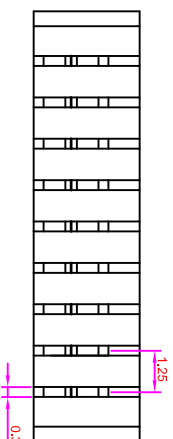
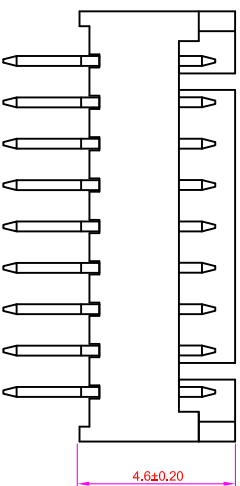
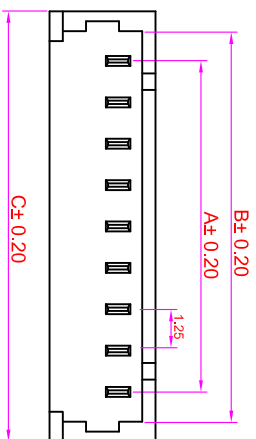


ROHS



Recommended
P.C. Board Hole Layout

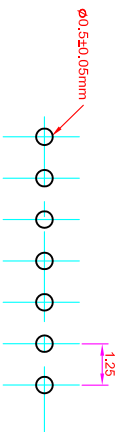

MATERIAL:

WAFFER:HIGH TEMPERA TURE PLASTIC NYLON46 UL94V-0
PIN:HIGH STRENGTH BRASS
WITH TIN OVER NICKEL PLATED

SPECIFICATION:

CURRENT RATE: 1 AMP
INSULATION RESISTANCE: 500 MΩ MIN
Contact Resistance: 20m Ω max.
DIELECTRIC VOLTAGE: 500 V AC FOR ONE MINUTE
OPERATION TEMPERATURE: -25°C ~ +85°C

Order Information

WA1251 - S0XX - 00XX

Serial Type _____
Terminal Type _____
S : Straight Type

No. of Contacts _____
02 ~ 15

Contact Plating _____
TA : Tin Plated

Poles	Dimensions			Poles	Dimensions		
	A	B	C		A	B	C
02	1.25	3.15	4.25	09	10.00	11.90	13.00
03	2.50	4.40	5.50	10	11.25	13.15	14.25
04	3.75	5.65	6.75	11	12.50	14.40	15.50
05	5.00	6.90	8.00	12	13.75	15.65	16.75
06	6.25	8.15	9.25	13	15.00	17.90	18.00
07	7.50	9.40	10.50	14	16.25	18.15	19.25
08	8.75	10.65	11.75	15	17.50	19.40	20.50

GENERAL TOLERANCE		單位 (UNIT)		料號 (PART NO.)		圖號 (DWG NO.)		名廠 (TITLE):	
X ± 0.50	X ° ± 5°	mm		WA1251-S0XX-00TA		WA1251-S0XX		IO PARTS Enterprise Co., Ltd.	
.X ± 0.20	.X ° ± 2°	mm		WA1251-S0XX-00TA		Free		Pitch: 1.25mm Wire To Board	
.XX ± 0.10	.XX ° ± 1°	mm		WA1251-S0XX-00TA		1/1		Water / Straight Dip Type	
DATE:2019/11/19	SBZ	Alice		Mary		B			

允企業有限公司
IO PARTS Enterprise Co., Ltd.