
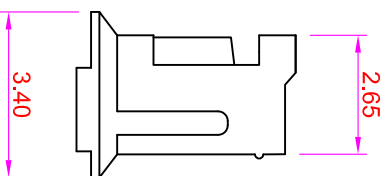
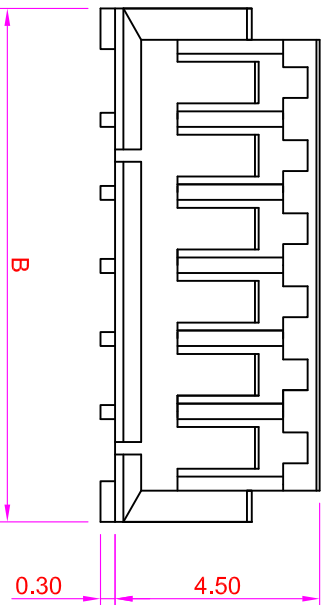


ROHS

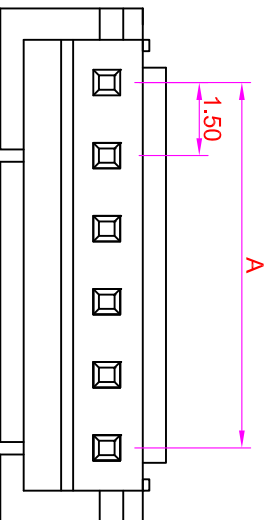

SPECIFICATIONS

Current rating : 1A AC,DC
 Voltage rating : 100V AC,DC
 Temperature range : -25°C to +85 °C
 Contact resistance : 20mΩ Max.
 Insulation resistance : 500MΩ Min.
 Withstanding voltage : 500V AC/minute
 Material : Nylon 66, UL94V-0

Rev	Modification Content	Date	Validate

Order Information

HU1501Z - XX


Serial No. _____

No. of Contacts _____

Poles	Dimensions		Poles	Dimensions	
	A	B		A	B
02	1.50	4.50	08	10.50	13.50
03	3.00	6.00	09	12.00	15.00
04	4.50	7.50	10	13.50	16.50
05	6.00	9.00	11	15.00	18.00
06	7.50	10.50	12	16.50	19.50
07	9.00	12.00	13	18.00	21.00

GENERAL TOLERANCE	
X. ± 0.50	X. ° ± 5°
.X ± 0.20	.X ° ± 2°
.XX ± 0.10	.XX ° ± 1°
DATE:2019/11/19	SBZ

單位 (UNIT)	料號 (PART NO.)	圖號 (DWG NO.)	名稱 (TITLE):
mm	HU1501Z-XX	HU1501Z-XX	IO 宏允企業有限公司 IO PARTS Enterprise Co.,Ltd.
審核 (APPROVAL)	校對 (CHECKED)	繪圖 (DRAWING)	名稱 (TITLE):
Alice	Mary	Fen-Fen	Pitch 1.50 Wire To Board / Housing
比例 (SCALE)	張數 (SHEET)	更改 (REV.)	
2.5 : 1	1 / 1	1.0	



1 2 3 4 5 6 7 8 9 10 11 12