

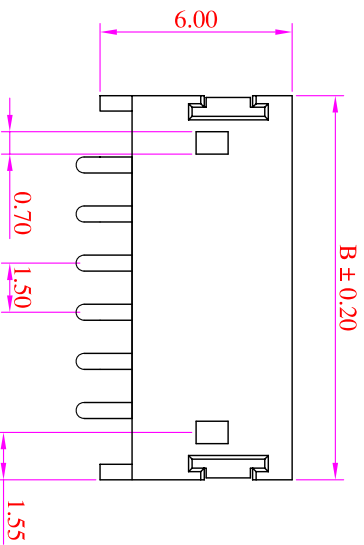
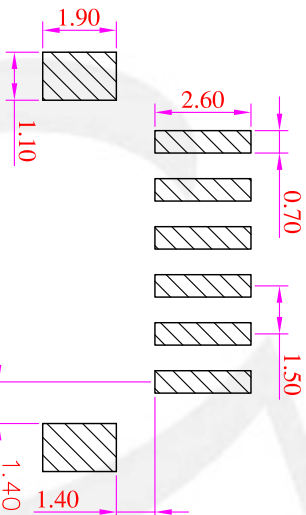


# ROHS

## Recommended P.C. Board SMD Layout

### SPECIFICATIONS

Current rating : 1A AC,DC  
 Voltage rating : 100V AC,DC  
 Temperature range : -25°C to +85 %° DC  
 Contact resistance : 20m Max.  
 Insulation resistance : 500V Min.  
 Withstanding voltage : 500V AC/minute  
 Material : Pin-Brass/Tin-plated  
 Base-Nylon 6T, UL94V-0

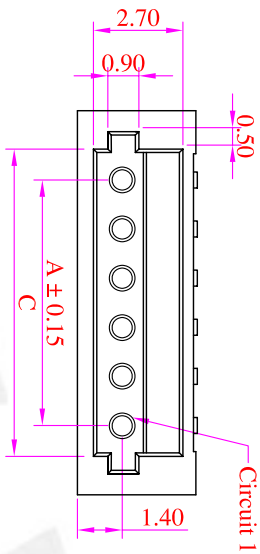

Poles	Dimension (mm)		
	A	B	C
2	1.50	6.00	3.60
3	3.00	7.50	5.10
4	4.50	9.00	6.60
5	6.00	10.50	8.10
6	7.50	12.00	9.60
7	9.00	13.50	11.10
8	10.50	15.00	12.60
9	12.00	16.50	14.10
10	13.50	18.00	15.60
11	15.00	19.50	17.10
12	16.50	21.00	18.60
13	18.00	22.50	20.10

**Order Information**  
 WA1501Z - M 0 XX - R 0 XX - XX  
 Serial No. \_\_\_\_\_  
 Terminal Type \_\_\_\_\_  
 M : SMD Type \_\_\_\_\_  
 No. of Contacts \_\_\_\_\_  
 Type Option \_\_\_\_\_  
 R: Right Angle \_\_\_\_\_  
 Contact Plated \_\_\_\_\_  
 Cap Option \_\_\_\_\_  
 B : Blank \_\_\_\_\_  
 F : Film \_\_\_\_\_  
 Packing Method \_\_\_\_\_  
 T : In Tube \_\_\_\_\_  
 R : Tape & Reel \_\_\_\_\_

GENERAL TOLERANCE		單位 (UNIT)	料號 (PART NO.)	圖號 (DWG NO.)	名號 (TITLE):
X. ± 0.50	X. ° ± 5°	Alice	WA1501Z-M0XX-R0XX-XX	WA1501Z-M0XX	IO PARTS Enterprise Co., Ltd.
.X ± 0.20	.X ° ± 2°	審核 (APPROVAL)	核對 (CHECKED)	比例 (SCALE)	Wire to Board Pitch : 1.5mm
.XX ± 0.10	.XX ° ± 1°	Alice	Mary	分法 (PROJ.)	Right Angle SMD Type
2009/09/05	SBZ		Fen-Fen	張數 (SHEET)	
				REV. (REV.)	
				1 / 1	

**IO PARTS Enterprise Co., Ltd.**

1 2 3 4 5 6 7 8 9 10 11 12

1 2 3 4 5 6 7 8 9 10 11 12

Rev	Modification	Date	Validate
-----	--------------	------	----------