

ROHS

Rev

Modification

Date

Validate

SPECIFICATIONS

Electrical

Current Rating: 2A AC, DC

Voltage Rating: 100V AC/ max.

Operating Temp.: -25°C ~ +85°C




Insulation Resistance: 1000MΩ/ min.

Dielectric Withstanding Voltage: 800V AC/ min.

Contact Resistance: 20mΩ/ max.

Material

Material: Nylon 66, UL94V-0

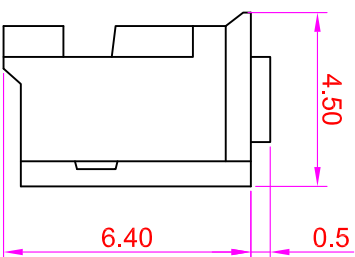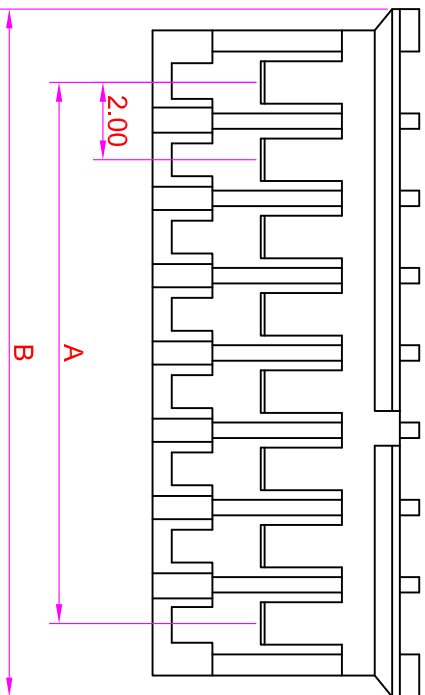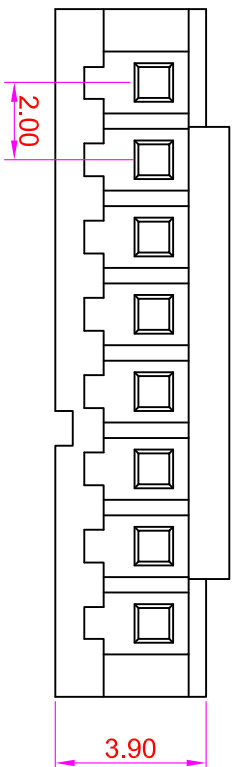

Order Information

HU2001J - XX

Serial No. _____

Contacts _____

XX :02 ~16

Poles	Dimension mm	
	A	B
2	2.0	5.8
3	4.0	7.8
4	6.0	9.8
5	8.0	11.8
6	10.0	13.8
7	12.0	15.8
8	14.0	17.8
9	16.0	19.8
10	18.0	21.8
11	20.0	23.8
12	22.0	25.8
13	24.0	27.8
14	26.0	29.8
15	28.0	31.8
16	30.0	33.8

GENERAL TOLERANCE		單位 (UNIT)	
X. ± 0.50	X. ° ± 5°	mm	
.X ± 0.20	.X ° ± 2°	審核 (APPROVAL)	
.XX ± 0.10	.XX ° ± 1°	Alice	Mary
DATE:2009/09/05	SBZ	Fen-Fen	比例 (DRAWING)
		HU2001J-XX	
		HU2001J-XX	
SCALE	3:1	張數	1/1
PROJ.		REV.	A

IO PARTS Enterprise Co., Ltd.

Pitch :2.0mm Housing