

Recommended  
P.C. Board Hole Layout

**SPECIFICATIONS**  
**Electrical**  
 Voltage Rating: 250V AC, DC  
 Current Rating: 5.0 A AC, DC  
 Withstand Voltage: 1500V AC/ min  
 Insulation Resistance: 1000M / min  
 Temperature Range: -25°C ~ +85°C  
**Material**  
 Wafer: High Temperature Plastic Nylon 46 UL94V-2  
 Pin: High Strength Brass With Tin Over Nickel Plated

Order Information

WA2001D - R 0 XX- 0 0 TA

Serial No. \_\_\_\_\_

Contact Type \_\_\_\_\_




R: Right Angle Type

No. Of Contacts \_\_\_\_\_

04pin ~ 32pin

Contact Plated \_\_\_\_\_

TA: Tin Plated

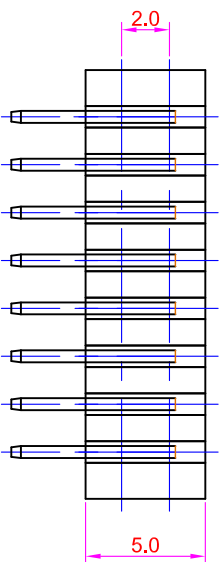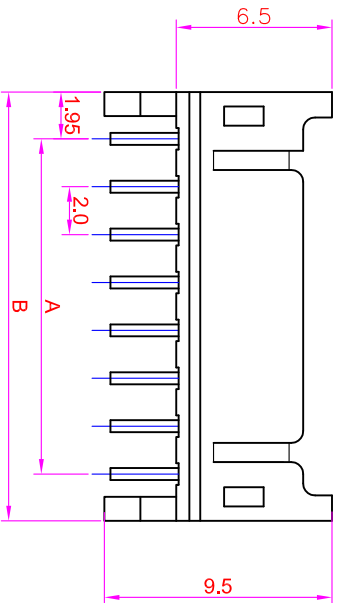

Poles	Dimension mm (in.)	
	A	B
4	2.0	4.0
6	4.0	8.0
8	6.0	10.0
10	8.0	12.0
12	10.0	14.0
14	12.0	16.0
16	14.0	18.0
18	16.0	20.0
20	18.0	22.0
22	20.0	24.0
24	22.0	26.0
26	24.0	28.0
28	26.0	30.0
30	28.0	32.0
32	30.0	34.0

GENERAL TOLERANCE	
X ± 0.50	X ° ± 5°
.X ± 0.20	.X ° ± 2°
.XX ± 0.10	.XX ° ± 1°
DATE:2008/08/05	SBZ

單位 (UNIT)	料號 (PART NO.)	審核 (CHECKED)	繪圖 (DRAWN)
mm	WA2001D-R0XX-00TA	Mary	Fen-Fen
Alice			

圖號 (DWG. NO.)	比例 (SCALE)	張數 (SHEET)
WA2001D-R0XX	Free	1 / 1
PROJ.	REV.	REV.
		1.0

**互允企業有限公司**  
 IO PARTS Enterprise Co., Ltd.  
 名稱 (TITLE): Wire To Board Pitch:2.0mm  
 Dual Row, R/A Dip Type