
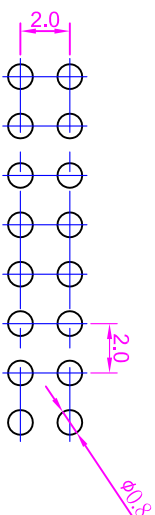


**ROHS**

**Recommended  
P.C. Board Hole Layout**

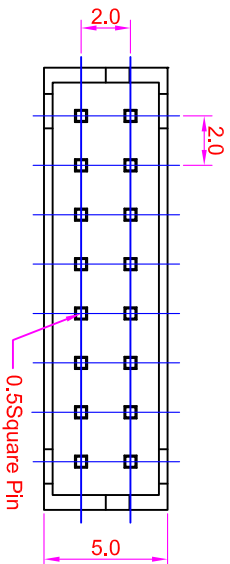

**SPECIFICATIONS**

**Electrical**

- Voltage Rating: 250V AC, DC
- Current Rating: 5.0 A AC, DC
- Withstand Voltage: 1500V AC/ min
- Insulation Resistance: 1000M / min
- Temperature Range: -25°C ~ +85°C

**Material**

- Wafer: High Temperature Plastic Nylon 46 UL94V-2
- Pin: High Strength Brass With Tin Over Nickel Plated

**Order Information**




WA2001D - S 0 XX- 0 0 TA

Serial No. \_\_\_\_\_

Contact Type \_\_\_\_\_  
S: Straight Type

No. Of Contacts \_\_\_\_\_  
04pin ~ 32pin

Contact Plated \_\_\_\_\_  
TA: Tin Plated

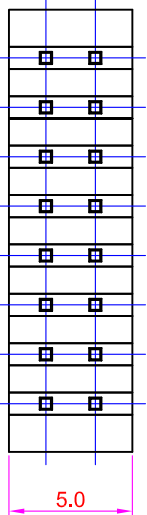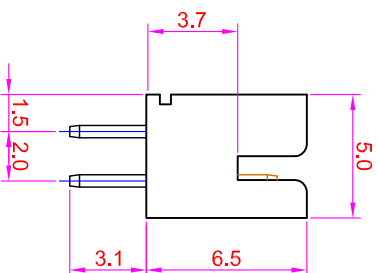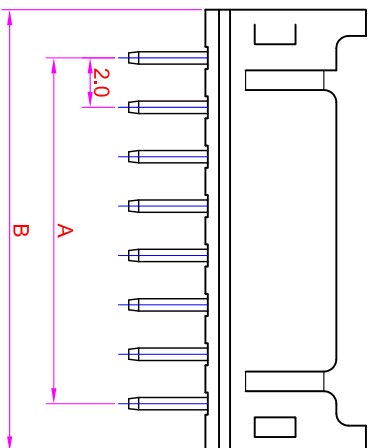

Poles	Dimension mm (in.)	
	A	B
4	2.0	4.0
6	4.0	8.0
8	6.0	10.0
10	8.0	12.0
12	10.0	14.0
14	12.0	16.0
16	14.0	18.0
18	16.0	20.0
20	18.0	22.0
22	20.0	24.0
24	22.0	26.0
26	24.0	28.0
28	26.0	30.0
30	28.0	32.0
32	30.0	34.0

GENERAL TOLERANCE	
X. ± 0.50	X. ° ± 5 °
.X ± 0.20	.X ° ± 2 °
.XX ± 0.10	.XX ° ± 1 °
DATE:2008/0805	SBZ

單位 (UNIT)	料號 (PART NO.)	檢製 (CHECKED)	製圖 (DRAWN)
mm	WA2001D-S0XX-00TA	Mary	Fen-Fen
Alice			

圖號 (DWG NO.)	比例 (SCALE)	張數 (SHEET)	更改 (REV.)
WA2001D-S0XX	Free	1 / 1	1.0

**IO 坊允企業有限公司**  
IO PARTS Enterprise Co., Ltd.

名稱 (TITLE): Wire To Board Pitch:2.0mm  
Dual Row , Straight Dip Type